



"FE-12" CONCEALED FASTENER PANEL W/ "FL-24" LINER PANEL

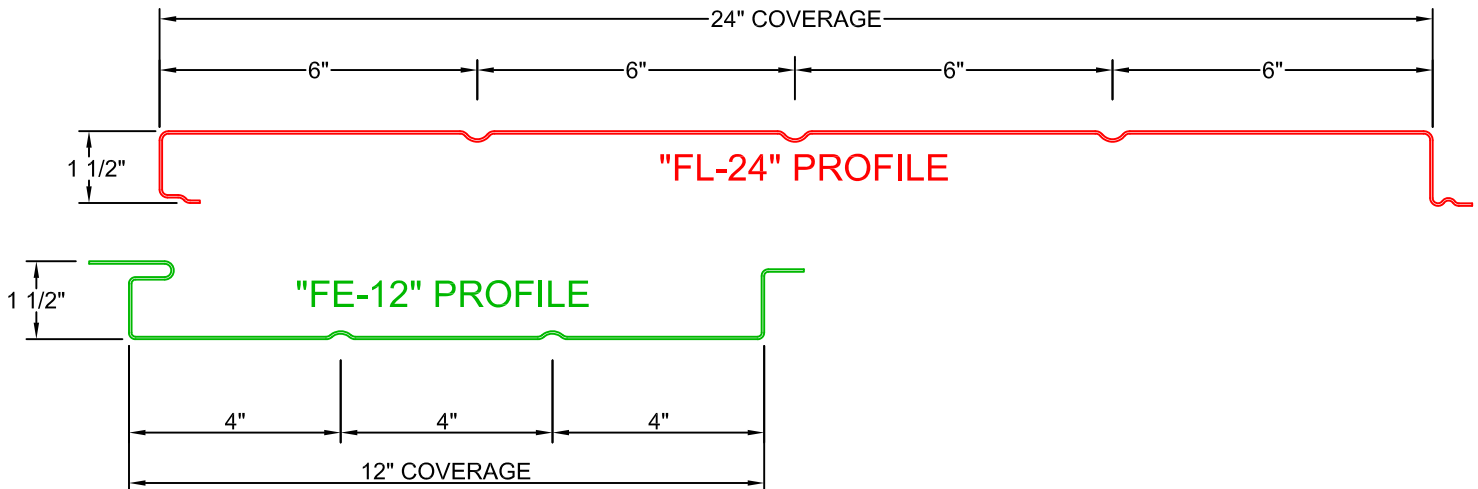

FLEXOSPAN RESERVES THE RIGHT TO REVISE, ADD, OR DELETE ANY DETAIL OR INFORMATION HEREIN WITHOUT PRIOR NOTICE.

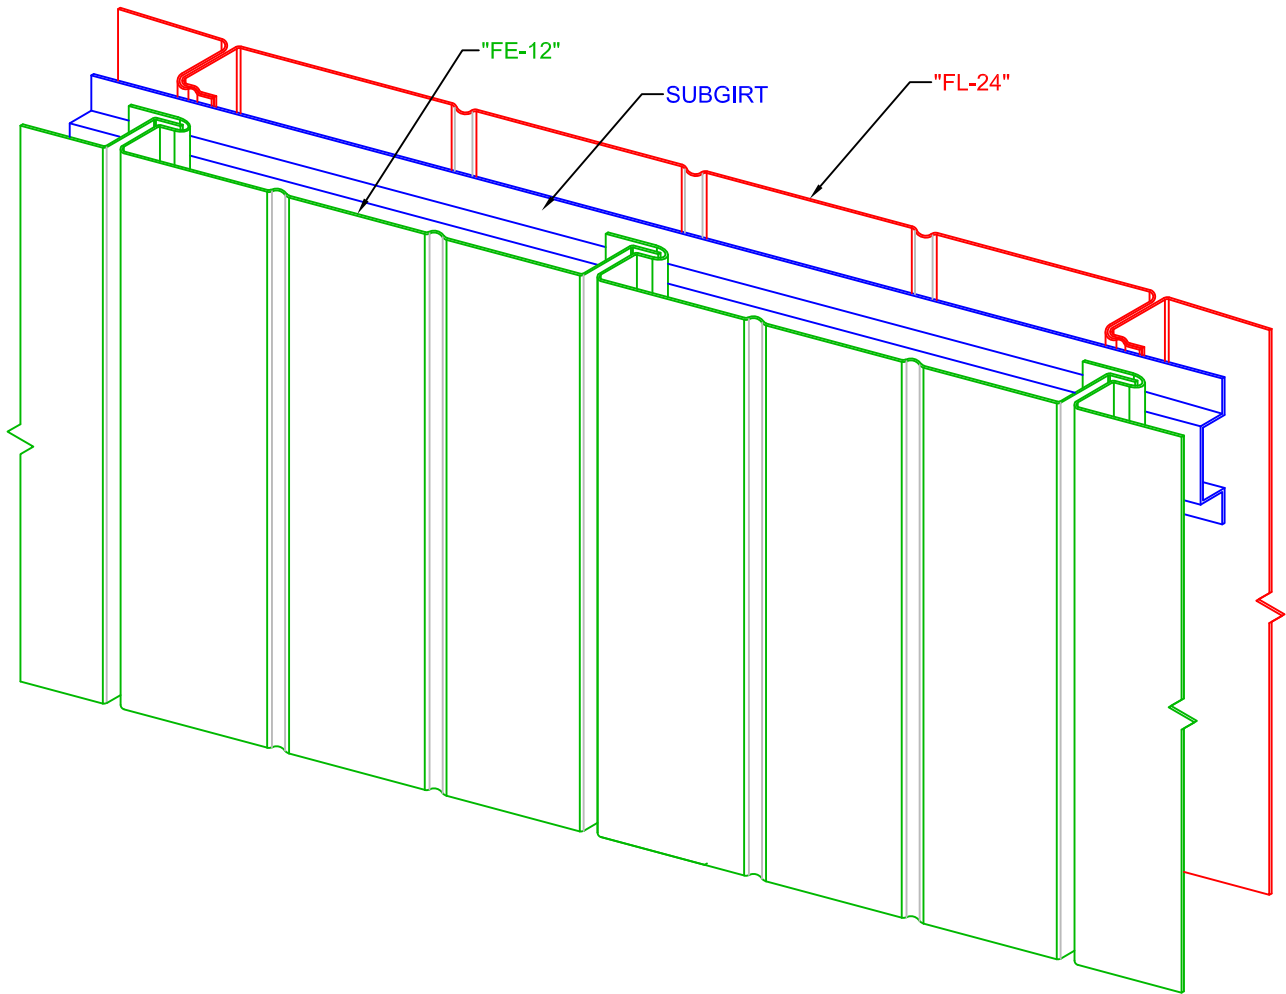

BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 • FAX: 724-376-3864

"FL-24" LINER PANEL STANDARD DETAILS

DRAWN BY:

D. JUREY

DATE:

5-20-25



CHECKED BY:

DATE:

COVER

DRAWING NO.

"FL-24"

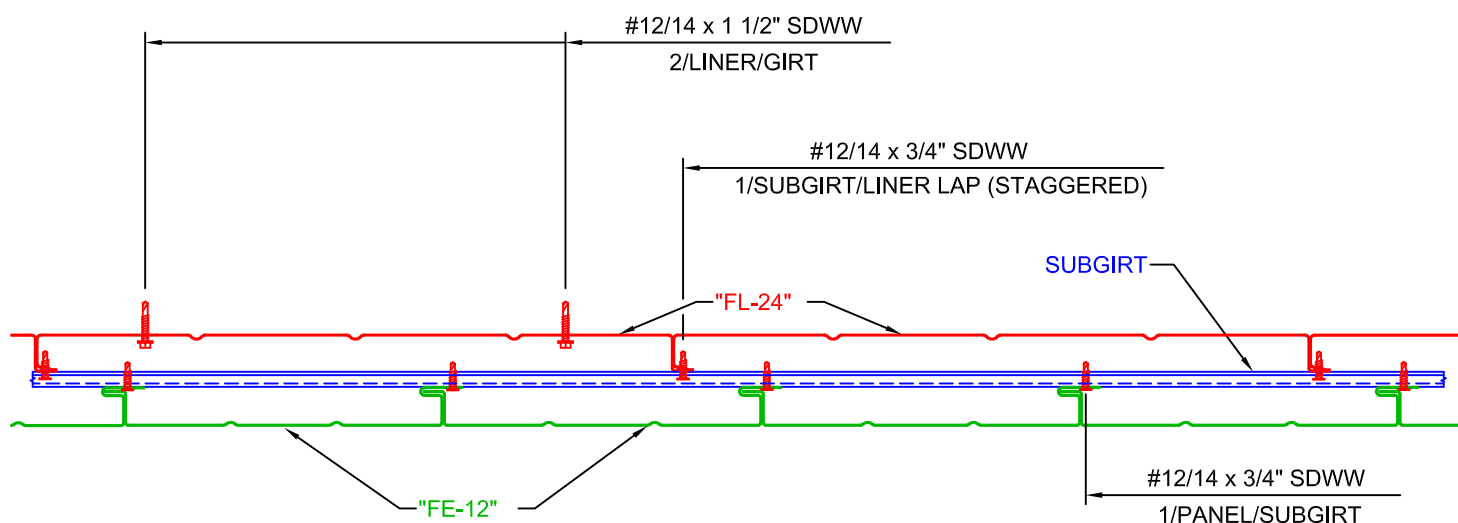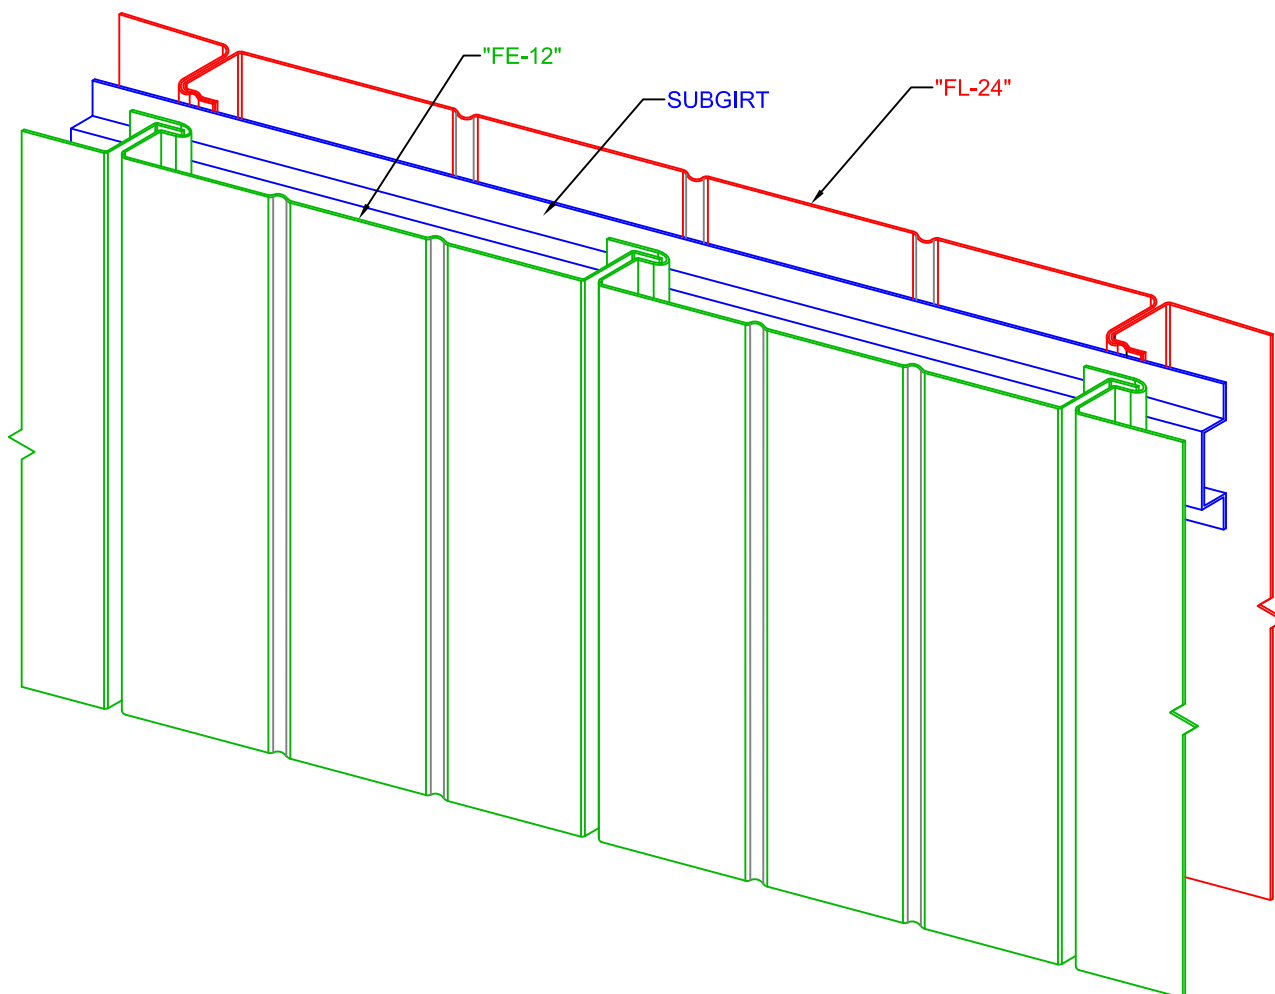

FLEXOSPAN RESERVES THE RIGHT TO REVISE, ADD, OR DELETE ANY DETAIL OR INFORMATION HEREIN WITHOUT PRIOR NOTICE.



BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 • FAX: 724-376-3864

"FL-24" LINER PANEL STANDARD DETAILS

DRAWN BY: D. JUREY

CHECKED BY:



DATE: 5-20-25

DATE:


ISOMETRIC FASTENING DETAIL

DRAWING NO.

FL24-3

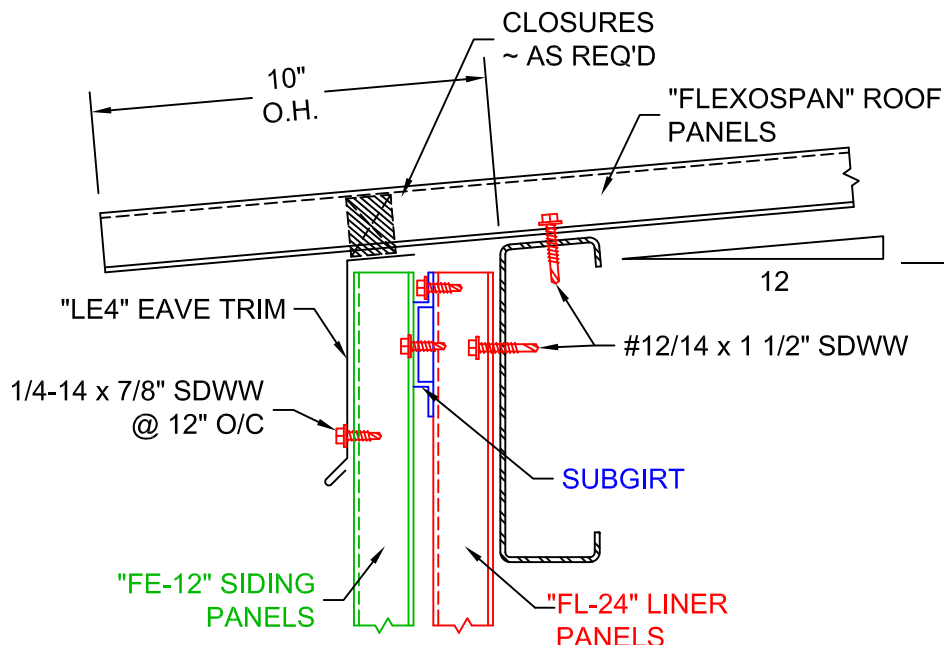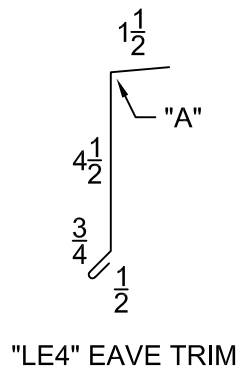

EAVE w/ TRIM

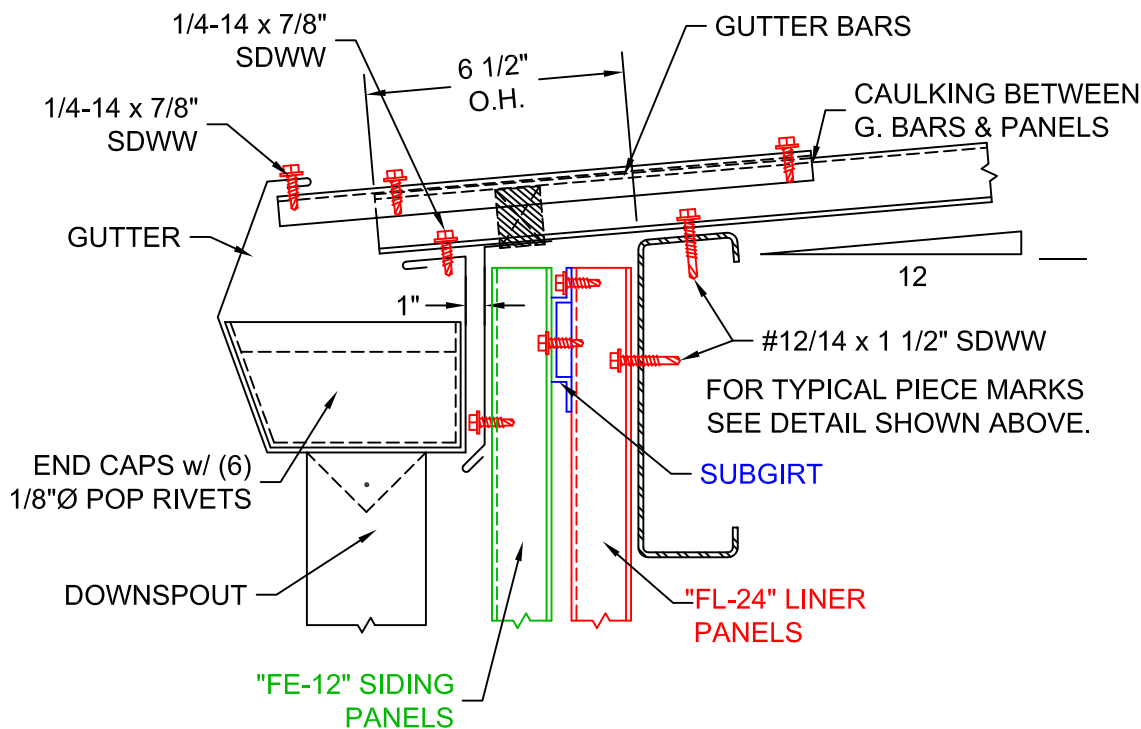

EAVE w/ TRIM & GUTTER

PITCH	"A" DIM.
1:12	95°
2:12	100°
3:12	104°
4:12	109°
5:12	113°

NOTES:

1. GUTTER AND RELATED ACCESSORIES ARE NOT A STANDARD PART OF THE "FL-24" LINER PANEL SYSTEM, BUT CAN BE MANUFACTURED AND SUPPLIED TO THE CUSTOMERS SPECIFICATION.
2. USE THE CHART TO THE LEFT FOR DIMENSION VALUES FOR YOUR PARTICULAR ROOF PITCH.



BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 • FAX: 724-376-3864

"FL-24" LINER PANEL STANDARD DETAILS

DRAWN BY:

D. JUREY

DATE:

5-20-25


CHECKED BY:

DATE:


EAVE DETAILS

DRAWING NO.

FL24-4

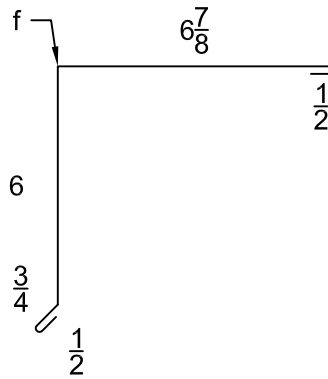

"GR1" GABLE TRIM

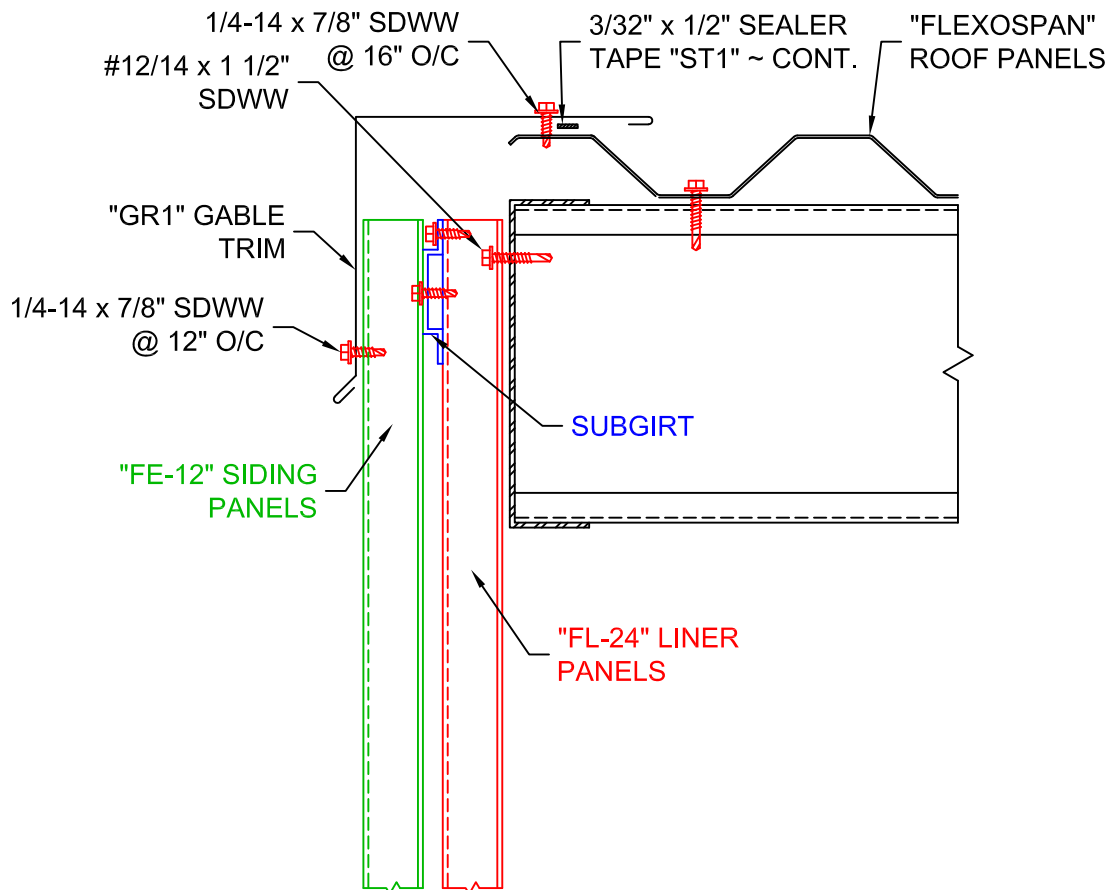

GABLE DETAIL



BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 • FAX: 724-376-3864

**"FL-24" LINER PANEL
STANDARD DETAILS**

DRAWN BY: D. JUREY

DATE: 5-20-25


CHECKED BY:

DATE:

GABLE DETAILS


DRAWING NO.

FL24-5




**"WR1" BASE
ROOF FLASH**


PITCH	"A" ANGLE
1:12	95°
2:12	99°
3:12	104°
4:12	108°
5:12	113°




**"SR1" BASE
ROOF FLASH**




"EJ6" FILLER TRIM



**"BD6" BASE
TRIM**

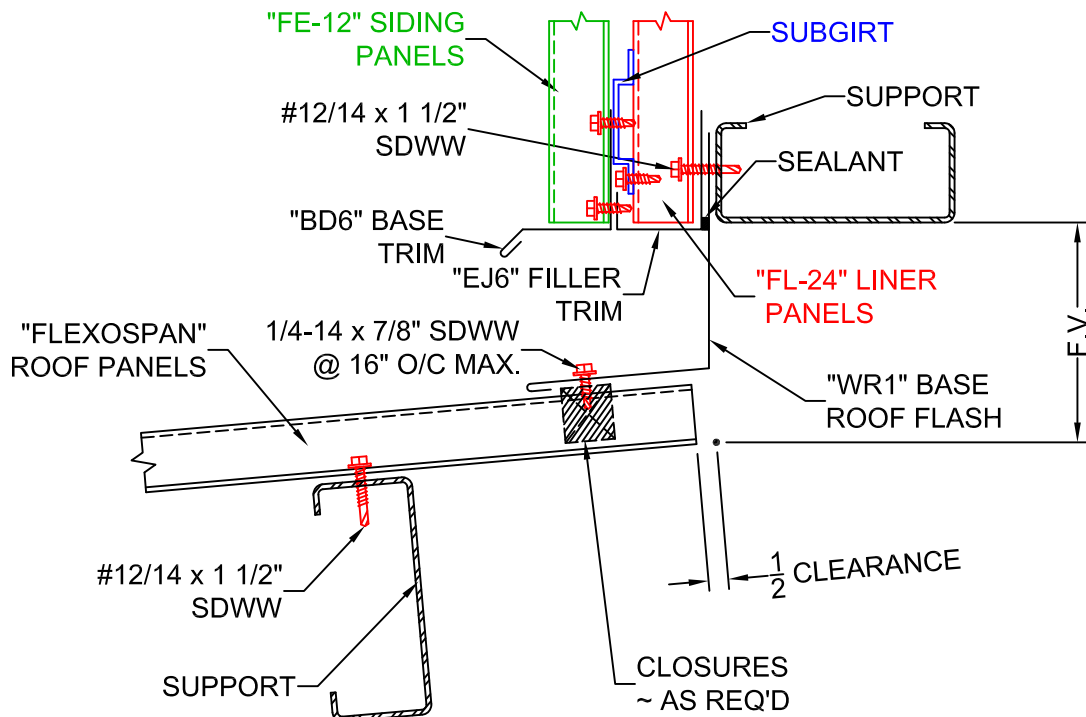

BASE ROOF(HALF RIDGE) DETAIL

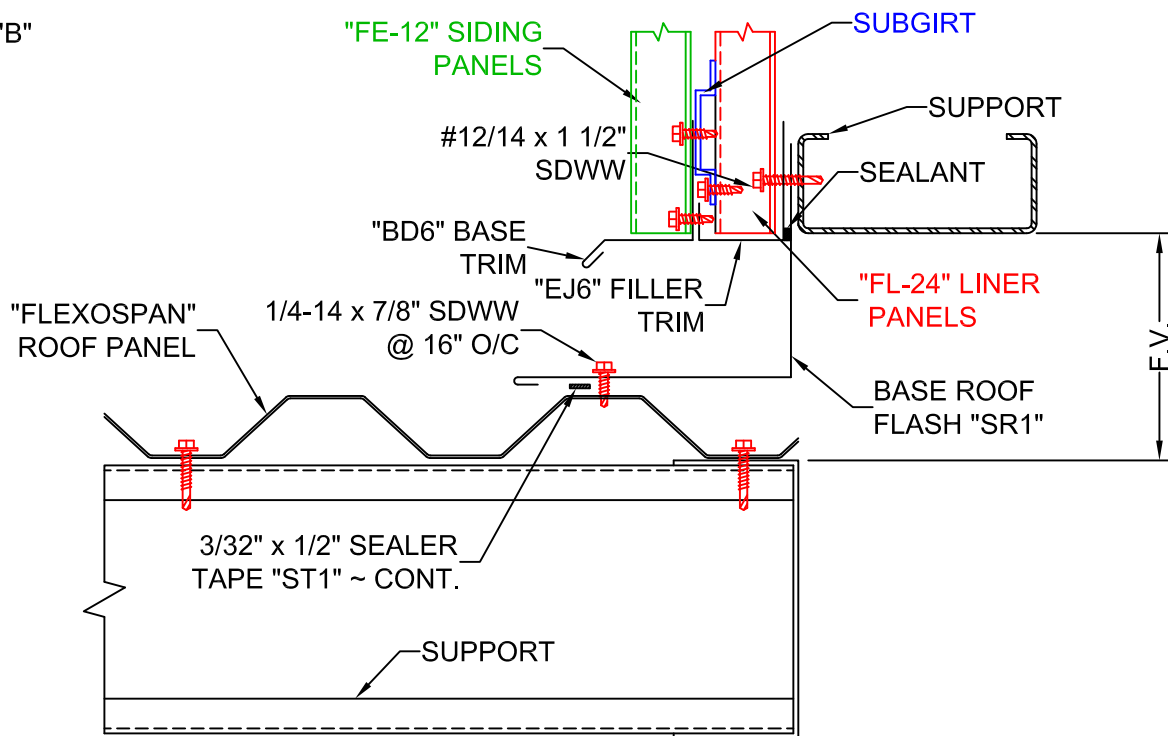

BASE ROOF DETAIL

ERECTOR NOTES:

1. ENDS OF BASE ROOF FLASH SHOULD BE CAULKED AND LAPPED 4" AWAY FROM PREVAILING WIND. FLASHING SHOULD BE STITCHED TOGETHER AT ENDS USING TWO 1/4-14 x 7/8" SDWW FASTENERS.
2. "A" & "B" DIMENSIONS VARY DUE TO CONSTRUCTION VARIATIONS.



BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 • FAX: 724-376-3864

"FL-24" LINER PANEL STANDARD DETAILS

DRAWN BY:

D. JUREY

DATE:

5-20-25


CHECKED BY:

DATE:


BASE ROOF DETAILS

DRAWING NO.


FL24-6

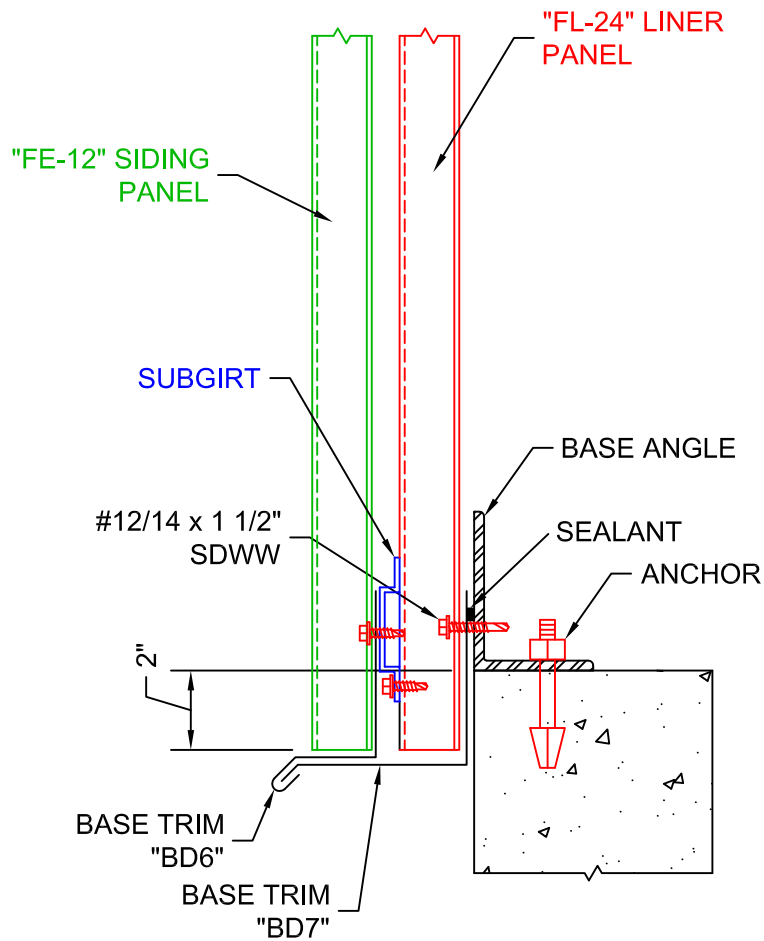

CURB w/ TRIM



"BD6" BASE TRIM



"BD7" BASE TRIM



BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 • FAX: 724-376-3864

"FL-24" LINER PANEL STANDARD DETAILS

DRAWN BY:

D. JUREY

DATE:

5-20-25







CHECKED BY:

DATE:

BASE DETAIL

DRAWING NO.

FL24-7

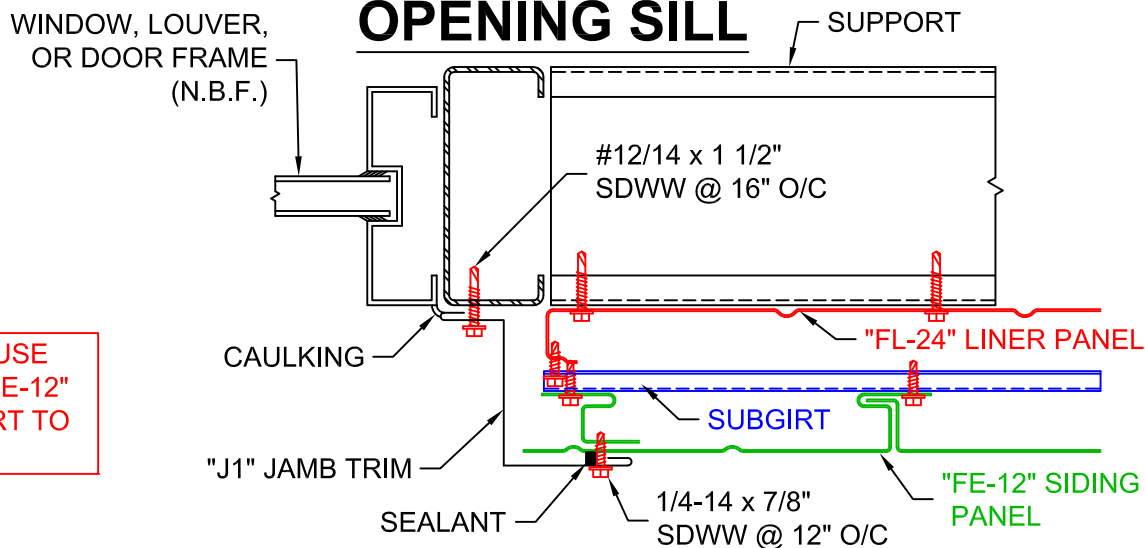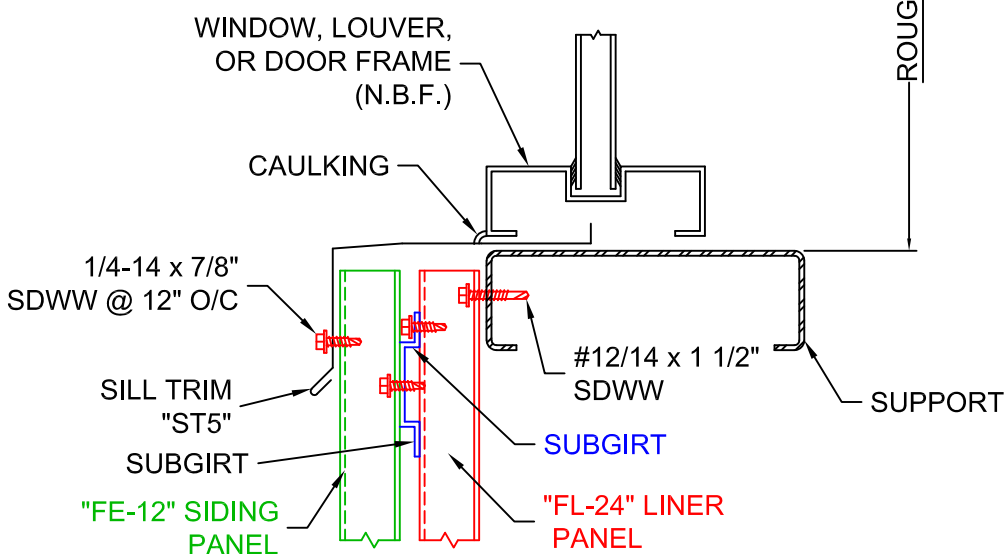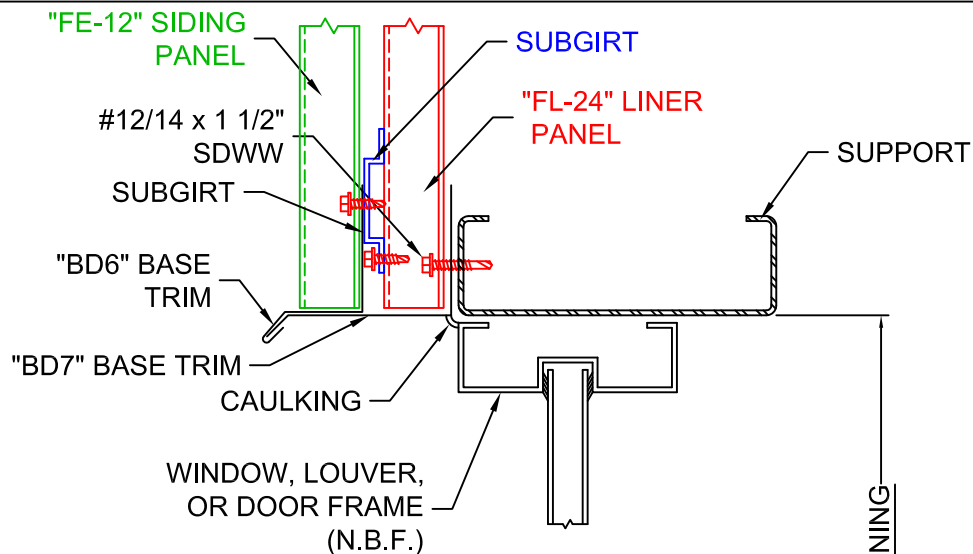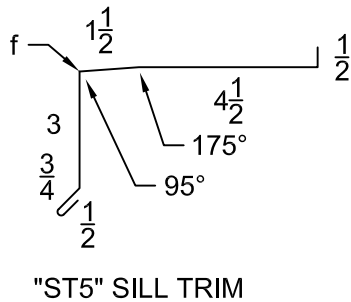

ERECTOR NOTE: USE TRIMMED LEG OF "FE-12" PANEL FOR SUPPORT TO ATTACH TRIM.



BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 • FAX: 724-376-3864

"FL-24" LINER PANEL STANDARD DETAILS


DRAWN BY: D. JUREY
CHECKED BY:

DATE: 5-20-25
DATE:


OPENING HEAD, SILL, & JAMB
DETAILS

DRAWING NO.

FL24-8

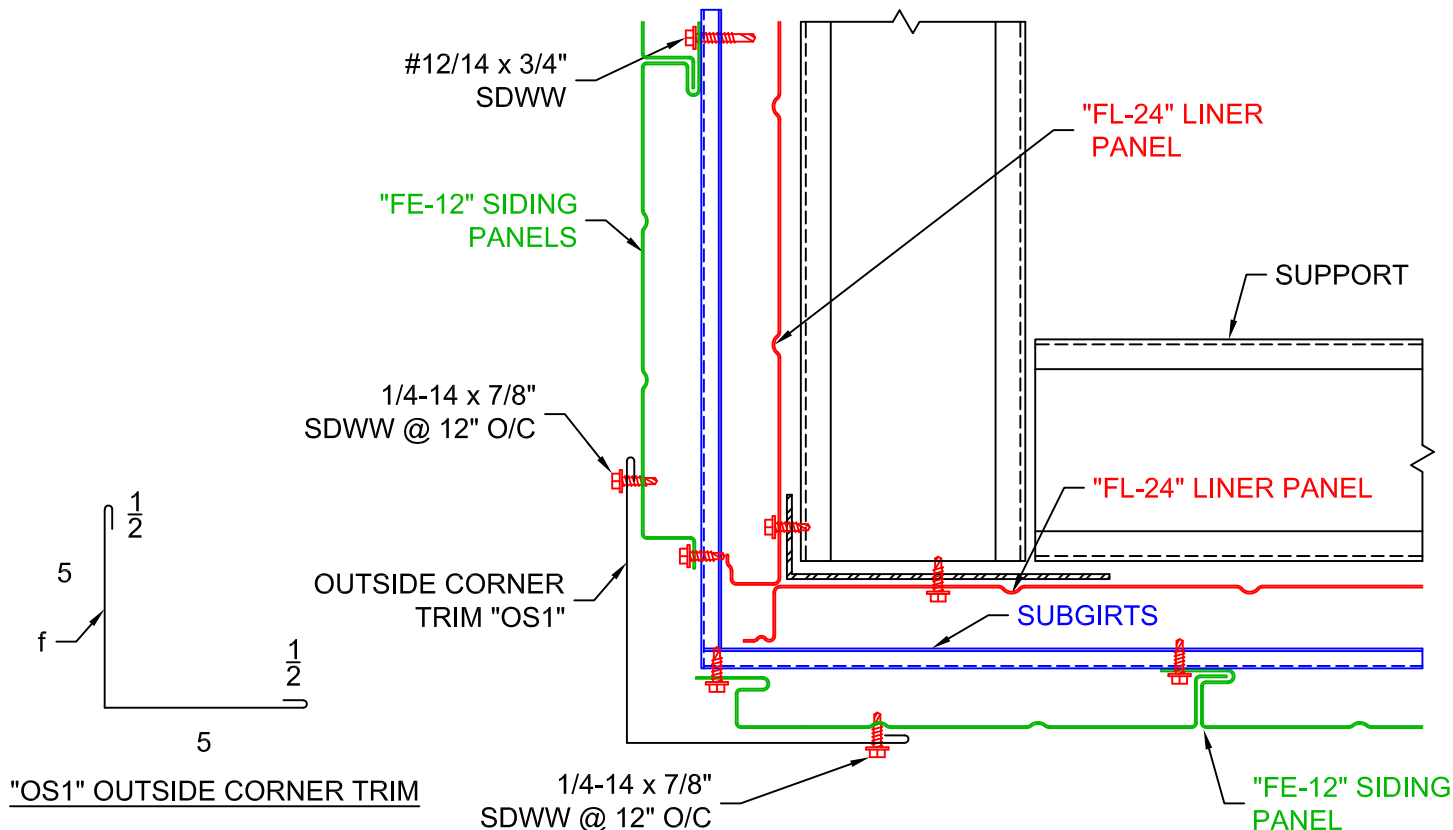

OUTSIDE CORNER DETAIL

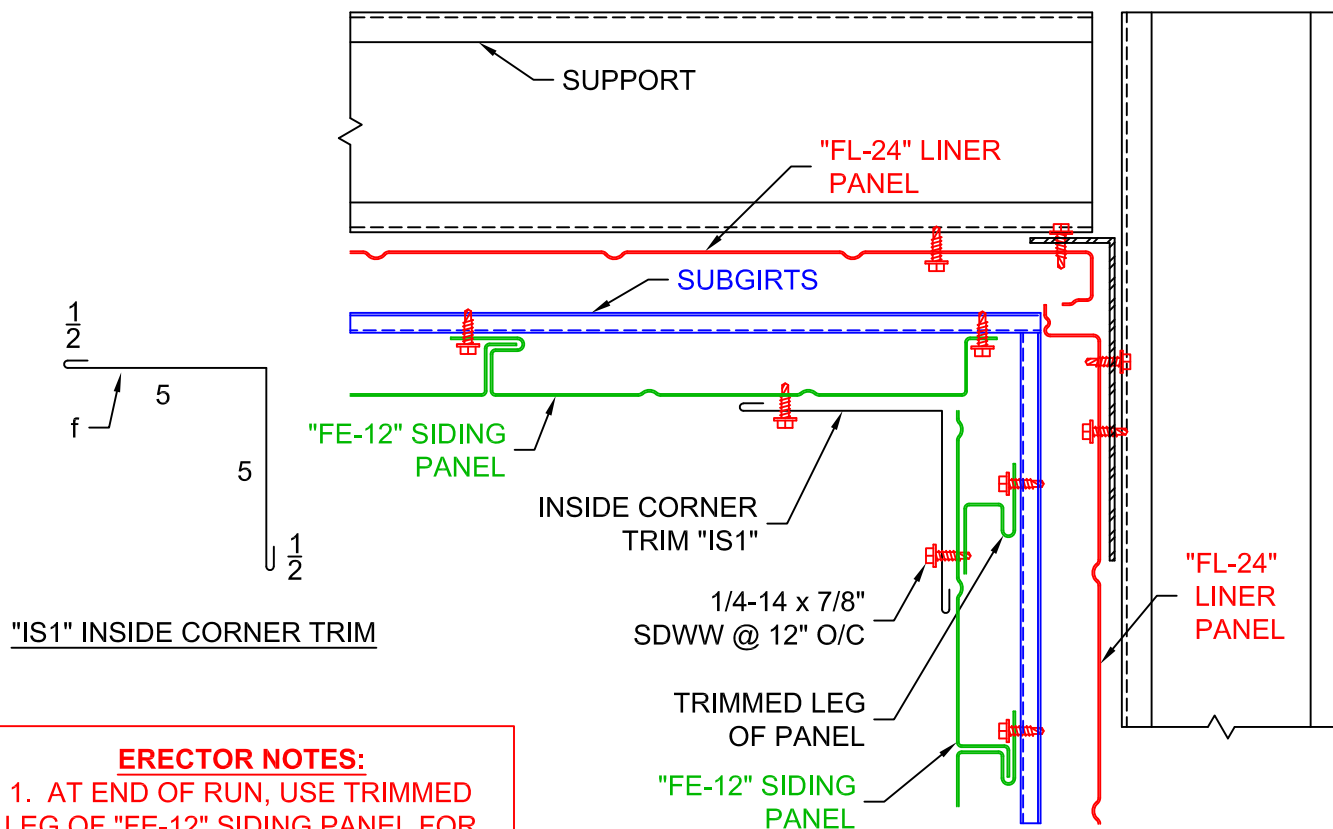

ERECTOR NOTES:

1. AT END OF RUN, USE TRIMMED LEG OF "FE-12" SIDING PANEL FOR SUPPORT TO ATTACH CORNER TRIM.

INSIDE CORNER DETAIL



BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 • FAX: 724-376-3864

"FL-24" LINER PANEL STANDARD DETAILS

DRAWN BY:

D. UREY

DATE:

5-20-25

CHECKED BY:

DATE:

OUTSIDE & INSIDE CORNER
DETAILS


DRAWING NO.

FL24-9

"FL-24" STANDARD TRIM SKETCHES

GA. # _____ COLOR _____

7 1/4"




REQ'D: _____ PCS. @ 10'-0" LG.

"LE4" EAVE TRIM

GA. # _____ COLOR _____

14 5/8"

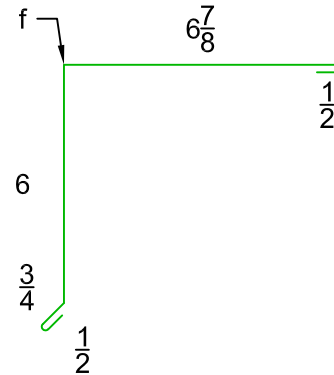


REQ'D: _____ PCS. @ 10'-0" LG.

"GR1" GABLE TRIM

GA. # _____ COLOR _____

GIRTH




REQ'D: _____ PCS. @ 10'-0" LG.

"WR1" BASE ROOF

GA. # _____ COLOR _____

GIRTH



REQ'D: _____ PCS. @ 10'-0" LG.

"SR1" BASE ROOF

NOTES:

1. ALL TRIM IS MANUFACTURED IN 10'-0" LENGTHS UNLESS SPECIFIED OTHERWISE.
2. MAXIMUM LENGTH OF TRIM IS 10'-0".
3. PLEASE INSERT GAUGE OF MATERIAL IN SPACES PROVIDED.
4. PLEASE INSERT COLOR OF MATERIAL IN SPACES PROVIDED.
5. PLEASE INSERT QUANTITY DESIRED WHERE SHOWN.
6. PLEASE INSERT REQ'D DIMENSIONS.



BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 ° FAX: 724-376-3864

"FL-24" LINER PANEL STANDARD DETAILS

DRAWN BY:

D. JUREY

DATE:

5/20/25

REVISED BY:

DATE:


"FL-24" STANDARD TRIM
SKETCHES

DRAWING NO.

FL24-10

"FL-24" STANDARD TRIM SKETCHES


GA.	# _____ COLOR _____
6 1/4"	



REQ'D: _____ PCS. @ 10'-0" LG.

"EJ6" FILLER TRIM


GA.	# _____ COLOR _____
6 1/4"	



REQ'D: _____ PCS. @ 10'-0" LG.

"BD6" BASE TRIM


GA.	# _____ COLOR _____
8 3/4"	



REQ'D: _____ PCS. @ 10'-0" LG.

"BD7" BASE TRIM

GA.	# _____ COLOR _____
10 11/16"	

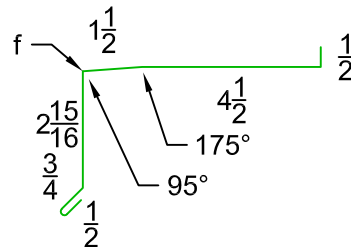

REQ'D: _____ PCS. @ 10'-0" LG.

"ST5" SILL TRIM

NOTES:

1. ALL TRIM IS MANUFACTURED IN 10'-0" LENGTHS UNLESS SPECIFIED OTHERWISE.
2. MAXIMUM LENGTH OF TRIM IS 10'-0".
3. PLEASE INSERT GAUGE OF MATERIAL IN SPACES PROVIDED.
4. PLEASE INSERT COLOR OF MATERIAL IN SPACES PROVIDED.
5. PLEASE INSERT QUANTITY DESIRED WHERE SHOWN.
6. PLEASE INSERT REQ'D DIMENSIONS.



BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 • FAX: 724-376-3864

"FL-24" LINER PANEL STANDARD DETAILS

DRAWN BY: D. JUREY

REVISED BY:

DATE: 5/20/25

DATE:

"FL-24" STANDARD TRIM SKETCHES


DRAWING NO.

FL24-II

"FL-24" STANDARD TRIM SKETCHES

GA. # _____ COLOR _____


11 1/8"



REQ'D: _____ PCS. @ 10'-0" LG.

GA. # _____ COLOR _____

11"




REQ'D: _____ PCS. @ 10'-0" LG.

"J1" JAMB TRIM

GA. # _____ COLOR _____

11"



REQ'D: _____ PCS. @ 10'-0" LG.

"OS1" OUTSIDE CORNER TRIM

SHEETING SCREWS



#12/14 x 1 1/2" SDWW
REQ'D: _____ PCS.

TRIM SCREWS



1/4-14 x 7/8" SDWW

"IS1" INSIDE CORNER TRIM

STANDARD FASTENERS

NOTES:

1. ALL TRIM IS MANUFACTURED IN 10'-0" LENGTHS UNLESS SPECIFIED OTHERWISE.
2. MAXIMUM LENGTH OF TRIM IS 10'-0".
3. PLEASE INSERT GAUGE OF MATERIAL IN SPACES PROVIDED.
4. PLEASE INSERT COLOR OF MATERIAL IN SPACES PROVIDED.
5. PLEASE INSERT QUANTITY DESIRED WHERE SHOWN.
6. PLEASE INSERT REQ'D DIMENSIONS.



BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 • FAX: 724-376-3864

"FL-24" LINER PANEL STANDARD DETAILS

DRAWN BY:

D. JUREY

DATE:

5/20/25

REVISED BY:

DATE:

"FL-24" STANDARD TRIM
SKETCHES

DRAWING NO.

FL24-12