


"FSS-1.5" STANDING SEAM ROOF SYSTEM



FSS-1.5 Series Standing Seam Roof System's 1 1/2" deep and flat profile make it ideal in residential, architectural, and light commercial projects.

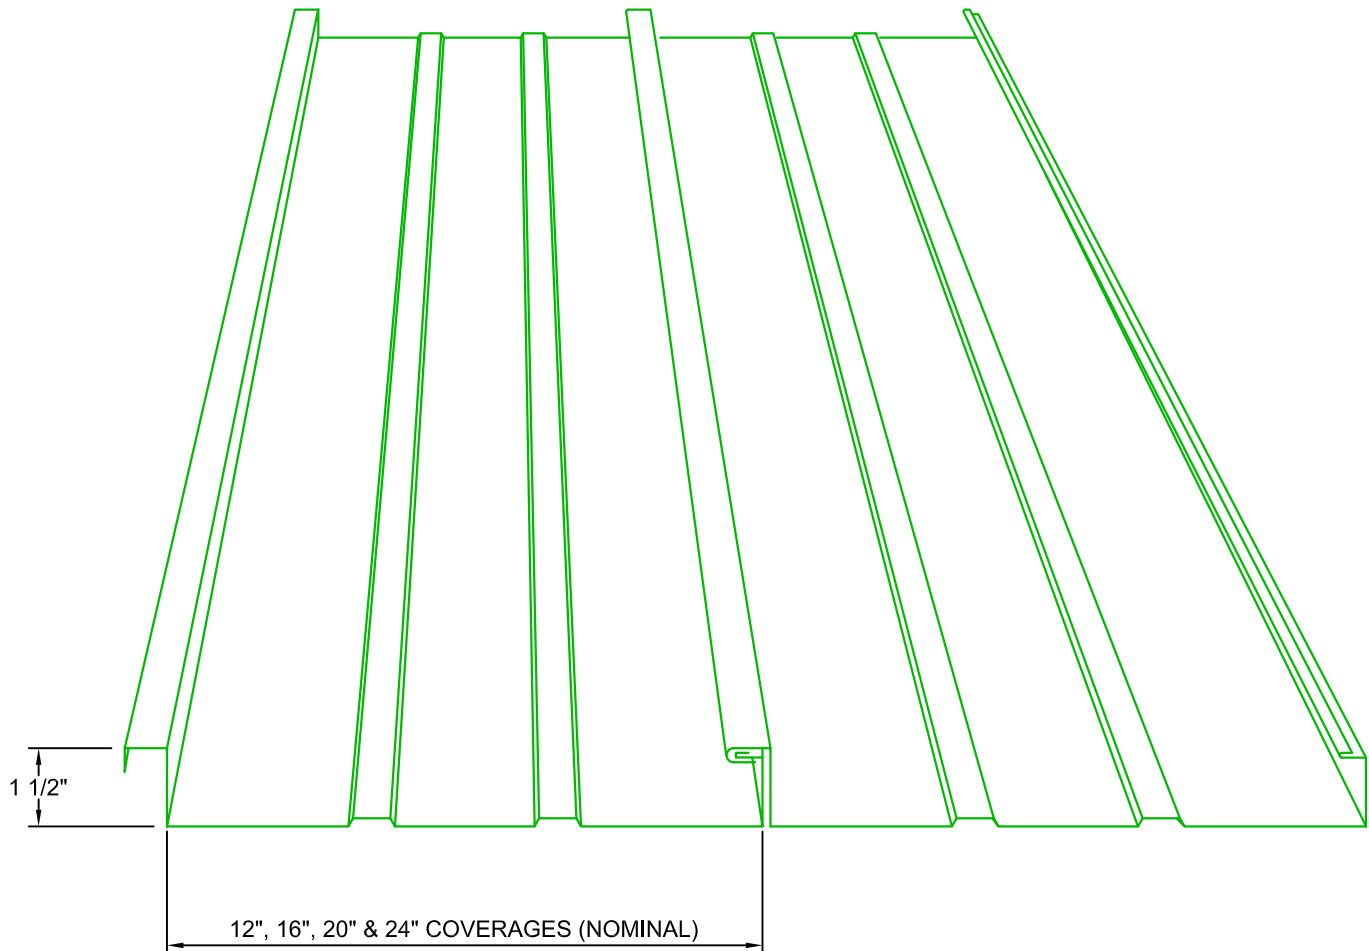

BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 • FAX: 724-376-3864

"FSS-1.5" STANDING SEAM DETAILS

DRAWN BY:

D. JUREY

DATE:

12-8-25

CHECKED BY:

DATE:

COVER

DRAWING NO.

FSSI.5-C

I. GENERAL NOTES:

- I(a).** "FSS-1.5" ROOF SYSTEM TO BE MANUFACTURED FROM GRADE "D" (50,000 PSI YIELD) G-90 GALVANIZED STEEL, GALVALUME, OR ALUMINUM ALLOY 3004-H14.
- I(b).** "FSS-1.5" ROOF SYSTEM TO BE BARE AS NOTED IN NOTE #1, OR PRE-PAINTED WITH A SILICONIZED POLYESTER, KYNAR®, OR FLEXSHIELD® FINISH.
- I(c).** "FSS-1.5" ROOF SYSTEM TO BE SUPPLIED IN FORMED PANEL LENGTHS UP TO 40'-0". PANELS 40'-60" ARE AVAILABLE WITH SPECIAL PACKAGING AND SHIPPING. PANELS IN EXCESS OF 60'-0" MAY BE ROLLFORMED ON THE JOBSITE.
- I(d).** "FSS-1.5" ROOF SYSTEM TO BE SUPPLIED WITH STD. FIXED CLIPS IN HEIGHTS TO SUIT APPLICATION. CLIPS TO BE SUPPLIED WITH TWO FASTENERS EACH. STANDARD SCREWS FOR ATTACHING CLIPS TO LT. GA. PURLINS ARE #10 x 5/8" PAN HEAD SELF-TAPPING & SELF-DRILLING SHEET METAL SCREWS. FOR ATTACHMENT INTO ANY MEMBERS OTHER THAN LT. GA. PURLINS, PLEASE CONTACT THE FACTORY FOR PROPER SCREW SELECTION AND AVAILABILITY.
- I(e).** "FSS-1.5" ROOF SYSTEM TO BE SUPPLIED WITH SEALANT AS REQUIRED FOR THE ERECTOR TO FIELD APPLY FOR WEATHERTIGHT THE SYSTEM AT THE SEAMS.
- I(f).** VARIOUS FLASHINGS, PIPE JACKS, FASTENERS, CLOSURES, AND SEALANTS CAN BE SUPPLIED IF REQUIRED TO COMPLETE A PROJECT.
- I(g).** CONTRACTOR IS RESPONSIBLE FOR THE PROPER INSTALLATION OF THE ROOF SYSTEM AND TO INSURE ALL PURLINS, OR SUB-FRAMING MEMBERS ARE PROPERLY INSTALLED AND ALIGNED IN ACCORDANCE WITH A.I.S.C. SPECIFICATIONS.
- I(h).** DUE TO INHERENT TOLERANCES OF BASE METAL, ANY FLAT SURFACE PANELS COULD HAVE SOME "OIL-CANNING". THIS IS NOT A BASIS FOR REJECTION OF THE PRODUCT.
- I(i).** DUE TO THE INDIVIDUALIZED NATURE OF PROJECTS, THE ERECTOR IS RESPONSIBLE FOR THE CORRECT PANEL LENGTHS & QUANTITIES, AND ALL ACCESSORY SIZES, TYPES, & QUANTITIES.

II. UNLOADING & STORAGE NOTES:

- II(a).** WHEN UNLOADING PANELS, SPREADER BAR & NYLON STRAPS OF THE PROPER SIZE, LENGTH, AND SPACING ARE TO BE USED BY SKILLED PERSONNEL APPLYING PROPER PROCEDURES TO PREVENT BUCKLING OR DAMAGE OF PANELS AND POSSIBLE BODILY INJURY.
- II(b).** UPON DELIVERY, INSPECT & TAKE INVENTORY OF ALL PARTS. NOTE ANY DAMAGED OR MISSING PARTS ON THE BILL OF LADING OR CONTACT FACTORY IMMEDIATELY.
- II(c).** INSPECT PANELS & TRIM FOR MOISTURE THAT MAY HAVE FORMED DURING SHIPMENT. IF MOISTURE IS PRESENT, THEN MATERIALS MUST BE UNPACKAGED, WIPED DRY, AND THEN RESTACKED.
- II(d).** IF INSIDE STORAGE IS NOT POSSIBLE, THEN ELEVATE ONE END OF BUNDLE AND COVER LOOSELY TO ALLOW AIR TO CIRCULATE THROUGH MATERIALS. NEVER USE PLASTIC TO COVER MATERIALS.
- II(e).** TRAPPED MOISTURE CAN CAUSE STAINING OF PANELS OR PROMOTE RUST ON UNPAINTED MATERIALS.
- II(f).** EXPOSURE TO DIRECT SUNLIGHT AND/OR HIGH HUMIDITY MAY CAUSE STRIPPABLE PLASTIC FILM TO ADHERE TO THE METAL PERMANENTLY AND DISCOLOR FINISH.

III. ERECTION NOTES:

- III(a).** RUN A LINE ALONG THE EDGE OF THE GABLE(RAKE) SIDE WHERE YOU ARE STARTING WITH AND SNAP A LINE. MAKE SURE THAT THE LINE IS PERPENDICULAR TO THE EAVE.
- III(b).** ATTACH STARTER CLIPS ALONG THE LINE JUST SNAPPED USING (2) #10 x 5/8" SCREWS. CLIPS SHOULD BE ATTACHED TO EACH PURLIN, BUT ARE NOT NECESSARY AT THE EAVE.
- III(c).** APPLY 1/8" x 1 5/8" SEALER TAPE "ST2" ALONG THE EAVE LINE. RUN THE TAPE OUT FAR ENOUGH TO KEEP YOURSELF FOUR OR FIVE PANELS AHEAD.
- III(e).** SET THE FIRST PANEL OVER THE STARTER CLIPS, MAKING SURE THE PANEL IS SQUARE WITH BUILDING AND NESTED ONTO THE STARTER CLIPS.
- III(f).** HAND CRIMP THE FEMALE LEG OF PANEL TO THE STARTER CLIPS.
- III(g).** APPLY A 1/8" BEAD OF CAULK OVER THE MALE LEG OF THE PANEL AT THE POINTS WHERE THE NEXT ROW OF CLIPS WILL BE INSTALLED(AT THE PURLINS).



BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 ° FAX: 724-376-3864

"FSS-1.5" STANDING SEAM DETAILS

DRAWN BY:	D. LUREY	DATE:	12-8-25
CHECKED BY:		DATE:	

GENERAL NOTES

DRAWING NO.

FSS15-1

III. ERECTION NOTES(cont.):

III(h). INSTALL NEXT ROW OF CLIPS OVER THE MALE LEG OF PANELS, MAKING SURE THEY ARE TIGHT FROM THE FIRST ROW OF CLIPS. HAND SEAM CLIPS TO PANEL. APPLY CAULKING OVER CLIPS.

III(i). APPLY THREE ROWS OF CAULKING(1/8" BEADS) TO THE VERTICAL LEG OF ROOF PANEL @ EAVE LINE STARTING AT THE SEALER TAPE & PROCEEDING UP LEG UNTIL MARRIED INTO SEALANT ON TOP OF MALE LEG.(SEE DETAILS).

III(j). FIELD APPLY A CONTINUOUS 1/8" BEAD OF CAULKING TO THE UNDERSIDE OF THE FEMALE LEG OF THE NEXT PANEL TO BE APPLIED.

III(k). INSTALL THE FEMALE LEG OF PANEL OVER THE MALE LEG OF THE PREVIOUSLY INSTALLED ROOF PANEL. CLAMP PANELS NEAR THE EAVE, RIDGE, PENETRATIONS, AND CLIP LOCATIONS. HAND SEAM PANELS TOGETHER 2'-0" AT THE EAVE, RIDGE, PENETRATIONS, AND CLIP LOCATIONS. AT LEAST THREE PANEL SEAMS TO BE CLAMPED AT ALL TIMES.

III(l). REPEAT THE PROCESS STARTING WITH NOTE III(g).

III(m). ANY CUTTING OR BEVELING OF PANELS @ ENDS OF PANEL RUNS, HIPS, VALLEYS, OR PENETRATIONS TO BE DONE BY THE ERECTOR IN THE FIELD.

III(n). IF APPLICABLE, REMOVE ALL STRIPPABLE PLASTIC FROM PANELS OR TRIM WHILE THEY ARE BEING ERECTED.

III(o). TO COMPLETE THE PROCESS, THE ENTIRE LEGNTH OF EACH PANEL MUST SEAMED EITHER WITH A HANDSEAMER OR AN ELECTRIC SEAMER IS AVAILABLE TO DO THIS PROCESS ON LARGER JOBS. WHETHER THE FINAL SEAMING IS DOWN WHEN THE TOTAL JOB IS COMPLETE OR AT THE END OF EACH DAY IS DEPENDENT UPON THE REQUIREMENTS OF EACH PROJECT.

IV. CLEAN-UP NOTES:

IV(a) INSPECT ENTIRE ROOF AND SIDING AREA. REMOVE ANY PIECES OF STRIPPABLE PLASTIC FILM STILL LEFT ON PANELS OR FLASHING. MAKE SURE FLASHING IS PROPERLY INSTALLED AND CAULKED WHERE SHOWN ON DETAILS.

IV(b). ANY METAL SHAVINGS FROM FIELD CUTTING OR DRILLING OF PANELS, MUST BE CLEANED OFF ROOF EACH DAY TO PREVENT RUST AND/OR DISCOLORATION OF PANELS.

IV(c). TOUCH-UP ANY SCRATCHES, NICKS, OR FASTENER HEADS WITH TOUCH-UP PAINT. MAKE SURE AREA IS THOROUGHLY CLEANED AND USE ONLY AN ARTISTS BRUSH. COVER ONLY THE SCRATCH - DO NOT PAINT OVER ANY PREPAINTED AREA.

V. CAUTIONS:

V(a). VERTICAL LEGS OF ROOF PANELS TO BE HELD TIGHTLY TOGETHER AT THE EAVES AND CLIP LOCATIONS BY USING CLAMPS. FAILURE TO CLAMP PANELS AT THESE LOCATIONS WILL NOT PERMIT PROPER SEAMING OF THE PANELS WITH THE ELECTRIC SEAMER AND/OR COULD COMPROMISE EVENTUAL WEATHERTIGHTNESS

V(b). CARE MUST BE TAKEN TO NOT OVER TORQUE FASTENERS.

V(b1). CARE MUST BE TAKEN NOT TO STEP ON PANEL BETWEEN FIRST PURLIN AND EAVE WHEN FASTENING EAVE SCREWS. THIS MAY CAUSE PONDING OF WATER.

V(c). DO NOT UNDER ANY CIRCUMSTANCE, STEP ON THE PANEL AT THE SEAMS OR AT THE PANEL ENDS. THE ROOF PANEL MAY NOT SUPPORT THE WEIGHT OF A MAN AT THESE LOCATIONS, WHICH COULD RESULT IN SERIOUS INJURY, AND IT COULD AFFECT PANEL ALIGNMENT.

V(d). CARE MUST BE TAKEN IN PROTECTING ROOF PANELS FROM OTHER TRADES, DISSIMILAR METALS, AND POSSIBLE RUN OFF OF HVAC EQUIPMENT.

V(e). THE DETAILS CONTAINED IN THE FOLLOWING PAGES ARE MERELY RECOMMENDATIONS AS TO HOW "FLEXOSPAN, INC." MATERIALS SHOULD BE INSTALLED. THEY MAY REQUIRE ADAPTATIONS OR MODIFICATIONS FOR A SPECIFIC PROJECT AS CONDITIONS VARY IN BOTH BUILDING DESIGN AND LOCAL WEATHER PECULIARITIES.

V(f). INSURING WATER-TIGHTNESS ON ANY GIVEN PROJECT IS THE FUNCTION OF THE INSTALLER. THE ARCHITECT/GENERAL CONTRACTOR/INSTALLER MUST ACCEPT THE RESPONSIBILITY TO ADAPT THESE DETAILS TO MEET PARTICULAR BUILDING REQUIREMENTS AND FIELD CONDITIONS AND TO INSURE ADEQUATE WATER-TIGHTNESS.

V(g). THE INSTALLER CAN VIRTUALLY ASSURE WATER-TIGHTNESS IF THESE FLASHING DETAILS HAVE BEEN PROPERLY ADAPTED, ADEQUATE LAPS HAVE BEEN PROVIDED, CORRECT TYPE OF SEALANT USED, ALL JOINTS ADEQUATELY CAULKED, AND PROFESSIONAL WORKMANSHIP EMPLOYED



BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 • FAX: 724-376-3864

"FSS-1.5" STANDING SEAM DETAILS

DRAWN BY:

D. LUREY

DATE:

12-8-25


CHECKED BY:

DATE:


GENERAL NOTES(CONT.)

DRAWING NO.

FSSI5-2

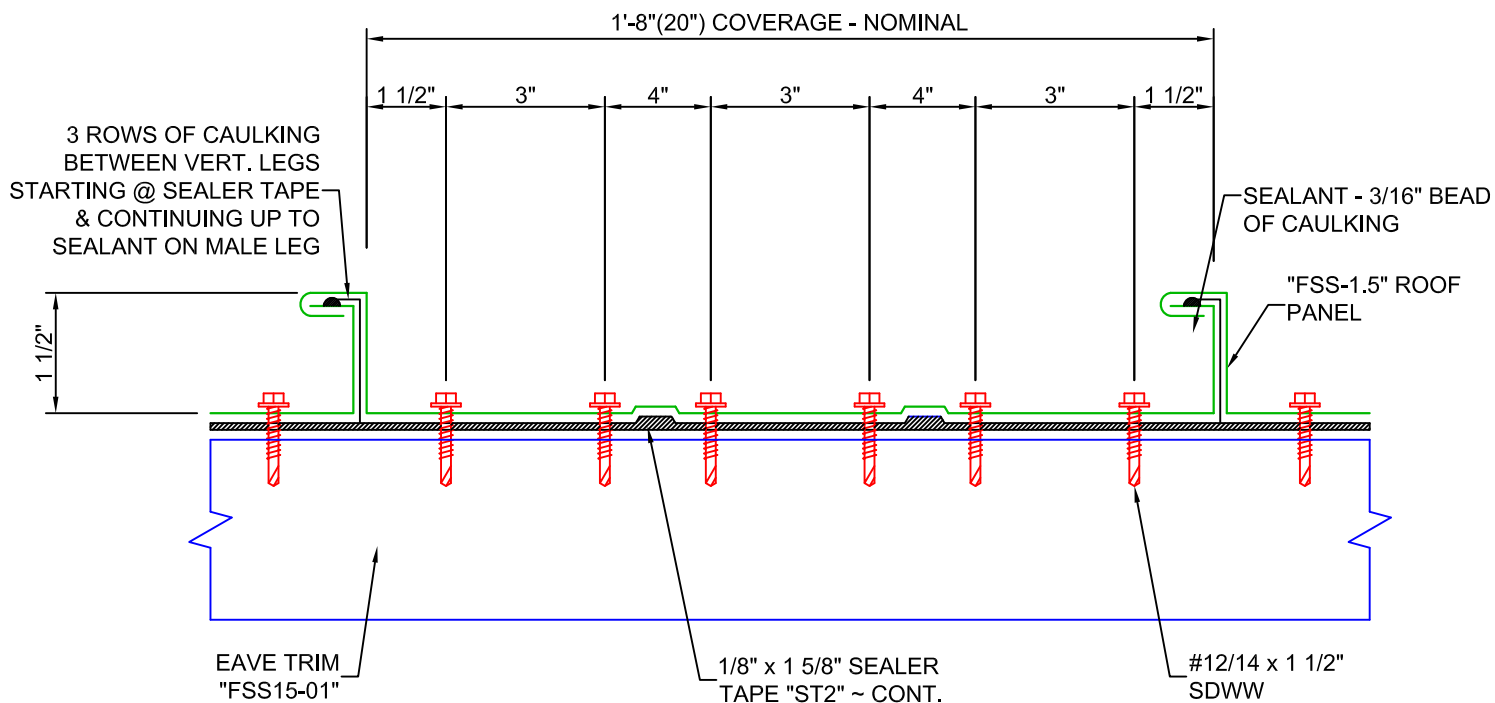


EAVE FASTENING DETAIL




** IMPORTANT **

FAILURE TO FOLLOW DIRECTIONS BELOW COULD RESULT IN PROBLEMS WITH ACHIEVING WEATHERTIGHTNESS & COULD CAUSE PROBLEMS WITH ATTACHMENT OF TRIM OR FLASHINGS.

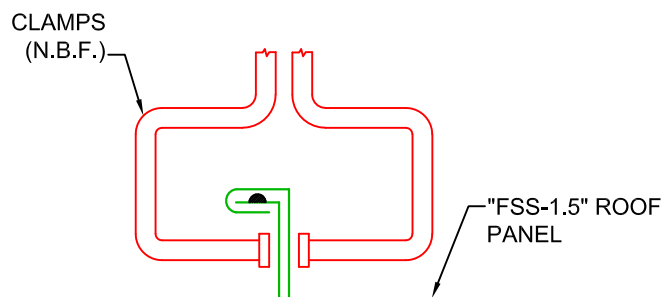

ERECTOR NOTE:
VERTICAL LEGS OF PANELS MUST BE HELD TIGHT TOGETHER USING CLAMPS @ EAVE, RIDGE, AND CLIP LOCATIONS. THIS MAINTAINS PROPER PANEL ALIGNMENT.

CORRECT

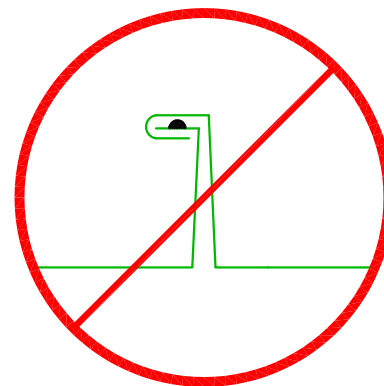

INCORRECT



BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 ° FAX: 724-376-3864

"FSS-1.5" STANDING SEAM DETAILS

DRAWN BY: D. JUREY

DATE: 12-8-25

CHECKED BY:


DATE:

EAVE FASTENING

DRAWING NO.


FSSI5-3

BEFORE SEAMING

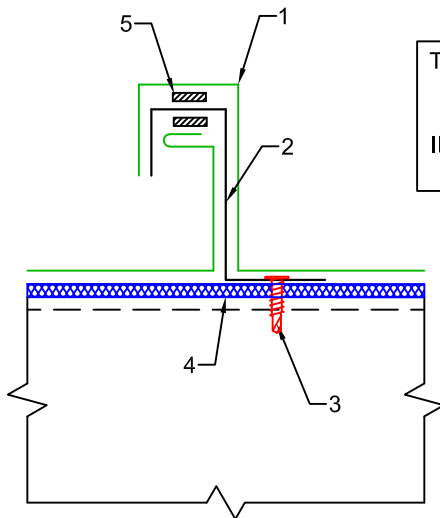

THIS DETAIL TO BE USED
W/ STANDARD
FIBERGLASS BLANKET
INSULATION OF UP TO 4"
THICKNESS.

AFTER SEAMING

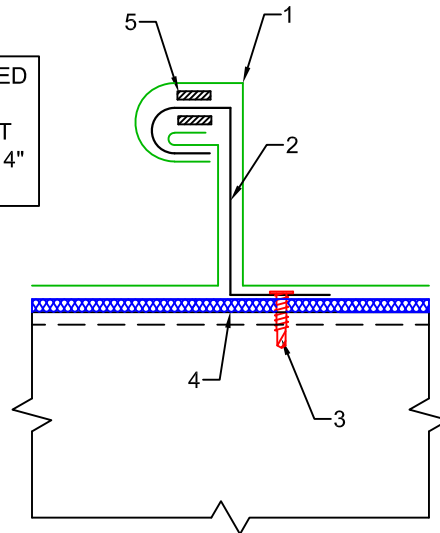

- 1 FLEXOSPAN "FSS-1.5" STANDING SEAM ROOF PANEL.
- 2 STANDARD 1 PC. FIXED CLIP.
- 3 #10 X 1/2" PHILLIPS DRIVE PANHEAD. TWO SCREWS PER CLIP.
- 4 STRUCTURAL STEEL, CEE, ZEE, OR LT. GAUGE OPEN WEB JOIST.
- 5 SEALANT: FIELD APPLIED TO INSIDE OF THE FEMALE RIB OR TO THE TOP OF THE MALE RIB AND IN EITHER CASE FIELD APPLIED OVER AND UNDER EACH CLIP. SEALANT TO BE CAULKING J5-773 AS MANUFACTURED BY TREMCO OR EQUAL.
- 6 VINYL BACKED FIBERGLASS INSULATION ~ 2" MIN.

NOTES:

- 1. IF APPLYING "FSS-1.5" OVER A DIFFERENT SUBSTRATE THAN SHOWN, PLEASE CALL FACTORY FOR SPECIAL DESIGN CONSIDERATIONS.



BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 ° FAX: 724-376-3864

"FSS-1.5" STANDING SEAM DETAILS

DRAWN BY: D. JUREY

DATE: 12-8-25

CHECKED BY:

DATE:


SEAMING DETAILS

DRAWING NO.


FSSI5-4

FIELD PANNING OR BOXING THE END OF THE "FSS-1.5" ROOF PANEL


STEP 1: FIELD COPE THE PANEL
BACK 1 5/8" FROM THE END.

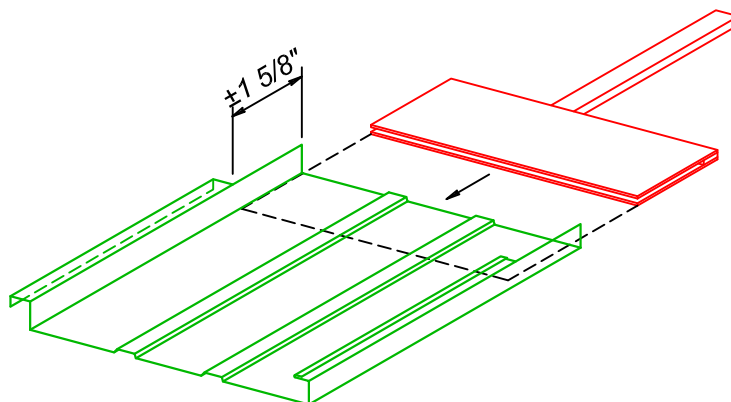

STEP 2: INSERT THE PANNING
TOOL AND FOLD THE PANEL
UPWARD. BEND UNTIL A 90° BEND
IS ACHIEVED.

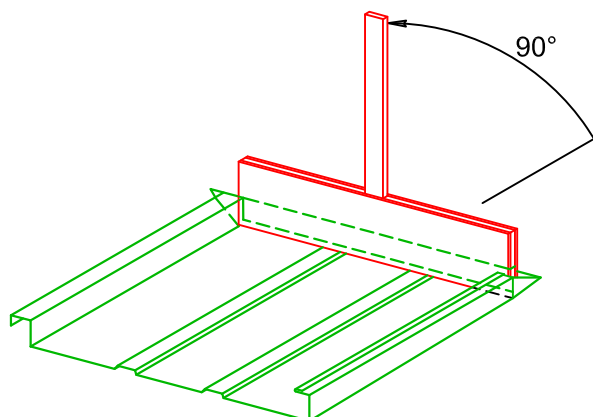

STEP 3: ONCE THE END BEND IS
COMPLETED, FOLD THE EXCESS
SIDE MATERIAL AROUND THE BACK
OF THE PANEL; NEVER TO THE
SIDES. BY FOLDING TO THE BACK
IT WILL LOCK THE END BOX INTO
PLACE.

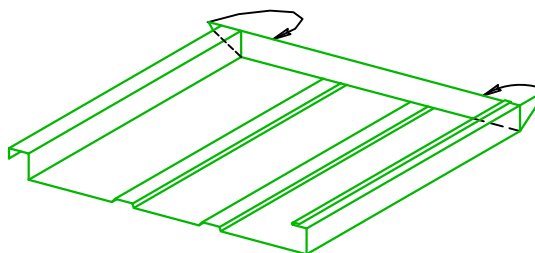

ERECTOR NOTES:

1. THE PEAK END OF ALL PANELS SHOULD HAVE THE BOXED END COMPLETED BEFORE STARTING THE ROOF SHEATHING.
2. BEND THE COPED ENDS OUTWARD PRIOR TO MAKING THE 90° BEND. THIS WILL ALLOW THE MATERIAL TO MOVE OUTWARD.
3. PANNING TOOL SHOWN FOR GENERAL PROCEDURE ONLY. THE SHAPE OF THE PANNING TOOL MAY VARY.



BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 ° FAX: 724-376-3864

"FSS-1.5" STANDING SEAM DETAILS

DRAWN BY:

D. JUREY

DATE:

12-8-25

CHECKED BY:


DATE:

PANNING DETAIL


DRAWING NO.

FSSI5-5


FIELD FORMING OF RIDGE CEE CLOSURES

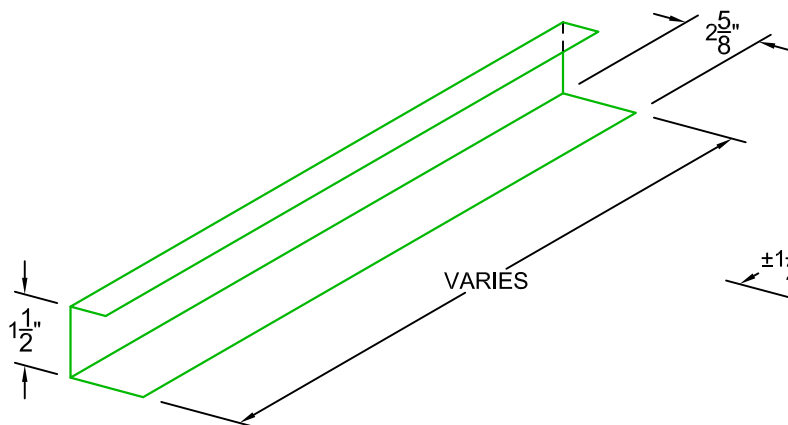


STEP 1: FIELD CUT (PANEL WIDTH + 3")
PIECES FROM 10'-0" SECTIONS.

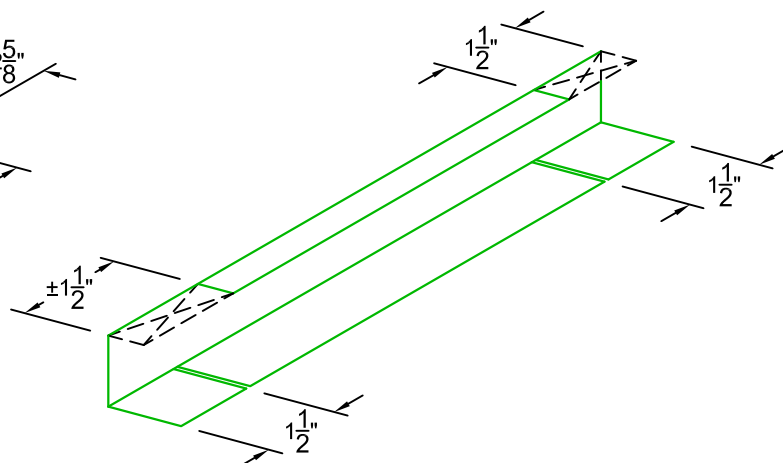

STEP 2: FIELD COPE TOP FLANGES AND
NOTCH BOTTOM FLANGES.

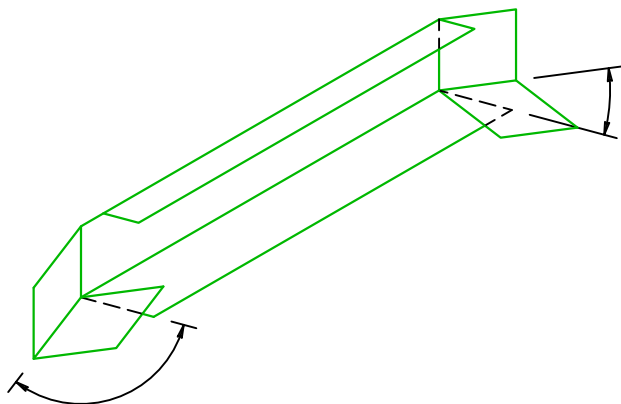

STEP 3: FIELD BEND THE CEE CLOSURE ENDS
AROUND COMPLETELY TO 90°.

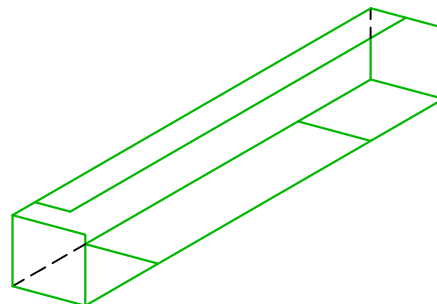

FINISHED PRODUCT

ERECTOR NOTES:

1. ALL DIMENSIONS ARE NOMINAL AND FIELD ADJUSTMENTS OF THEM MAY BE NECESSARY TO ACHIEVE ULTIMATE WEATHERTIGHTNESS.
2. CEE CLOSURES @ HIP RIDGES ARE FIELD FORMED SIMILAR.



BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 ° FAX: 724-376-3864

"FSS-1.5" STANDING SEAM DETAILS

DRAWN BY:

D. JUREY

DATE:

12-8-25



CHECKED BY:

DATE:


FIELD FORMING OF RIDGE
CLOSURES

DRAWING NO.

FSSI5-6

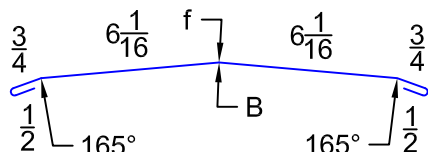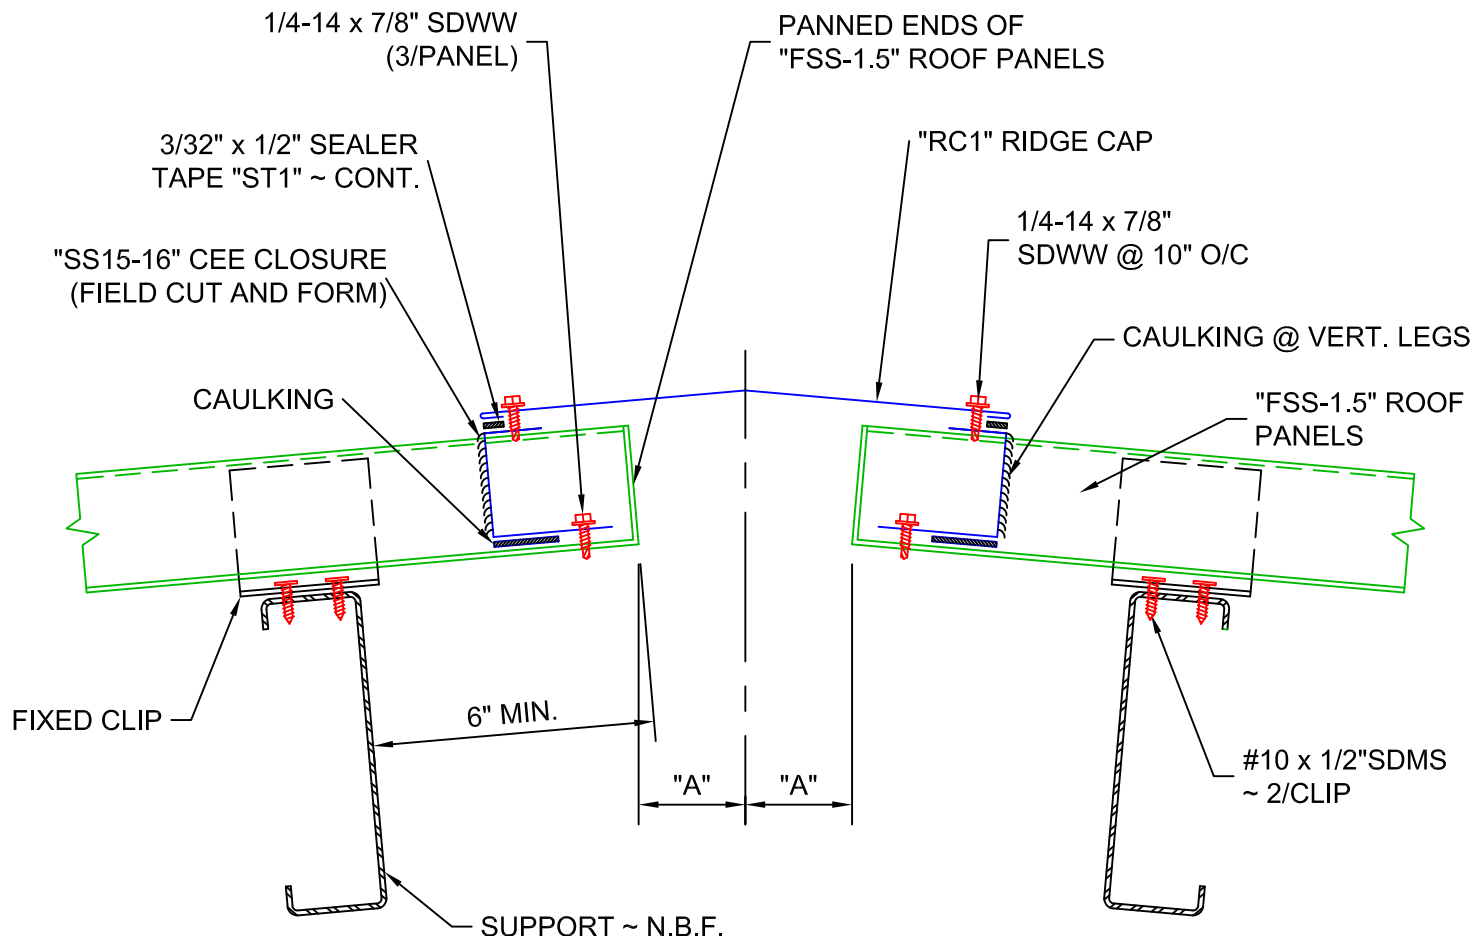

"RC1" RIDGE CAP



"SS15-16" CEE CLOSURE

<u>ROOF PITCH</u>	<u>"A" DIM.</u>	<u>"B" ANGLE</u>
.5 IN 12	3 1/8"	175°
1 IN 12	2 7/8"	170°
2 IN 12	2 1/2"	161°
3 IN 12	2 1/8"	151°

ERECTOR NOTES:

1. THE ENDS OF ROOF SHEETS TO BE POSITIONED "A" DISTANCE AWAY FROM THE CENTERLINE OF THE ROOF. "A" DISTANCE VARIES WITH THE ROOF PITCH. SEE TABLE ABOVE FOR THE "A" VALUE FOR YOUR REQUIRED ROOF PITCH.
2. THE ENDS OF RIDGE CAPS TO BE CAULKED AND LAPPED 4" AWAY FROM PREVAILING WIND. RIDGE CAPS TO BE STITCHED WITH TWO FASTENERS ON EACH SIDE.
3. "SS15-16" CEE CLOSURE TO BE FIELD CUT AND FORMED AS SHOWN ON PAGE "FSS15-6".
4. "B" DIMENSION VARIES WITH ROOF PITCH; SEE TABLE ABOVE FOR CORRECT VALUE.



BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 ° FAX: 724-376-3864

**"FSS-1.5" STANDING
SEAM DETAILS**

DRAWN BY:

D. JUREY

DATE:

12-8-25

CHECKED BY:

DATE:

RIDGE & HIP
DETAIL

DRAWING NO.

FSSI5-7

3 ROWS OF CAULKING
(BETWEEN VERT. LEGS)

1/8" x 1 5/8" SEALER
TAPE "ST2" ~ CONT.

#12/14 x 1 1/2" SDWW
(SEE EAVE FASTENING
DETAIL FOR SPACING)

FIXED CLIP

1 1/2"

#10 x 1/2" PHILLIPS
DRIVE PANHEADS
(2/CLIP)

EAVE TRIM

CLOSURES
(AS REQ'D)

"FLEXOSPAN"
SIDING PANELS

EAVE MEMBER

12

.5 MIN.

3 ROWS OF CAULKING
(BETWEEN VERT. LEGS)

1'-0"

#12/14 x 1 1/2" SDWW
(SEE EAVE FASTENING
DETAIL FOR SPACING)

1/8" x 1 5/8" SEALER
TAPE "ST2" ~ CONT.

12

.5 MIN.

EAVE TRIM

CLOSURES
(AS REQ'D)

"FLEXOSPAN"
SIDING PANELS

EAVE MEMBER



BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 • FAX: 724-376-3864

"FSS-I.5" STANDING SEAM DETAILS

DRAWN BY:

D. JUREY

DATE:

12-8-25


CHECKED BY:

DATE:


EAVE DETAIL

DRAWING NO.


FSSI5-8

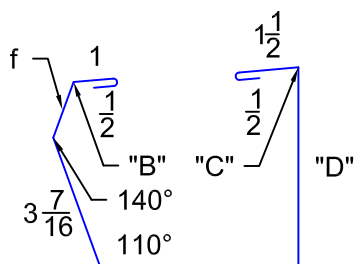

"SSGU2" GUTTER




"GSS1" GUTTER BARS

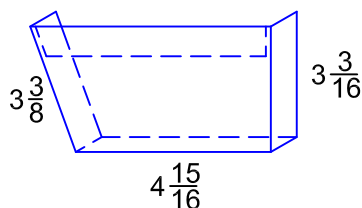


"GU1EC(R&L)" END CAPS


"GU1ECR" ~ AS SHOWN
"GU1ECL" ~ OPP. HAND



"DS1" DOWNSPOUTS

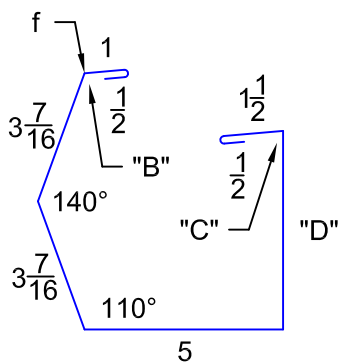

"GU1" GUTTER



"SS15-14" GUTTER BARS

3 ROWS OF CAULKING
BETWEEN VERT. LEGS

1/4-14 x 7/8" SDWW
@ 12" O/C

1/4-14 x 7/8"
SDWW

"SSGU2"
GUTTER

"GU1ECR" END
CAPS w/ (6)1/8"
POP RIVETS

DOWNSPOUT
"DS1"

"GSS1" GUTTER
BARS @ 20" O/C

CAULKING BETWEEN
"GSS1" & PANELS

#12/14 x 1 1/2" SDWW
(SEE EAVE FASTENING
DETAIL FOF SPACING)

MARK	PITCH	"B" DIM.	"C" DIM.	"D" DIM.
SSGU21	1:12	115°	85°	5 1/16"
SSGU22	2:12	119°	81°	5 1/2"
SSGU23	3:12	124°	76°	6"
SSGU24	4:12	128°	72°	6 7/16"
SSGU25	5:12	133°	67°	6 15/16"

3 ROWS OF CAULKING
BETWEEN VERT. LEGS

1/4-14 x 7/8" SDWW
@ 8" O/C

"15GU1"
GUTTER

"GU1ECR" END
CAPS w/ (6)1/8"
POP RIVETS

"DS1"
DOWNSPOUT

"SS15-14" GUTTER
BARS

CAULKING BETWEEN
"SS15-14" & PANEL

#12/14 x 1 1/2" SDWW
(SEE EAVE FASTENING
DETAIL FOF SPACING)

MARK	PITCH	"B" DIM.	"C" DIM.	"D" DIM.
15GU11	1:12	115°	85°	5 3/8"
15GU12	2:12	120°	80°	5 3/4"
15GU13	3:12	124°	76°	6 3/16"
15GU14	4:12	129°	71°	6 9/16"
15GU15	5:12	133°	67°	6 15/16"



BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 ° FAX: 724-376-3864

"FSS-I.5" STANDING SEAM DETAILS

DRAWN BY:

D. JUREY

DATE:

12-8-25



CHECKED BY:

DATE:

EAVE W/ GUTTER DETAIL

DRAWING NO.

FSSI5-9

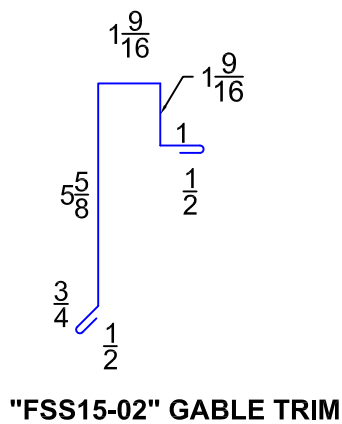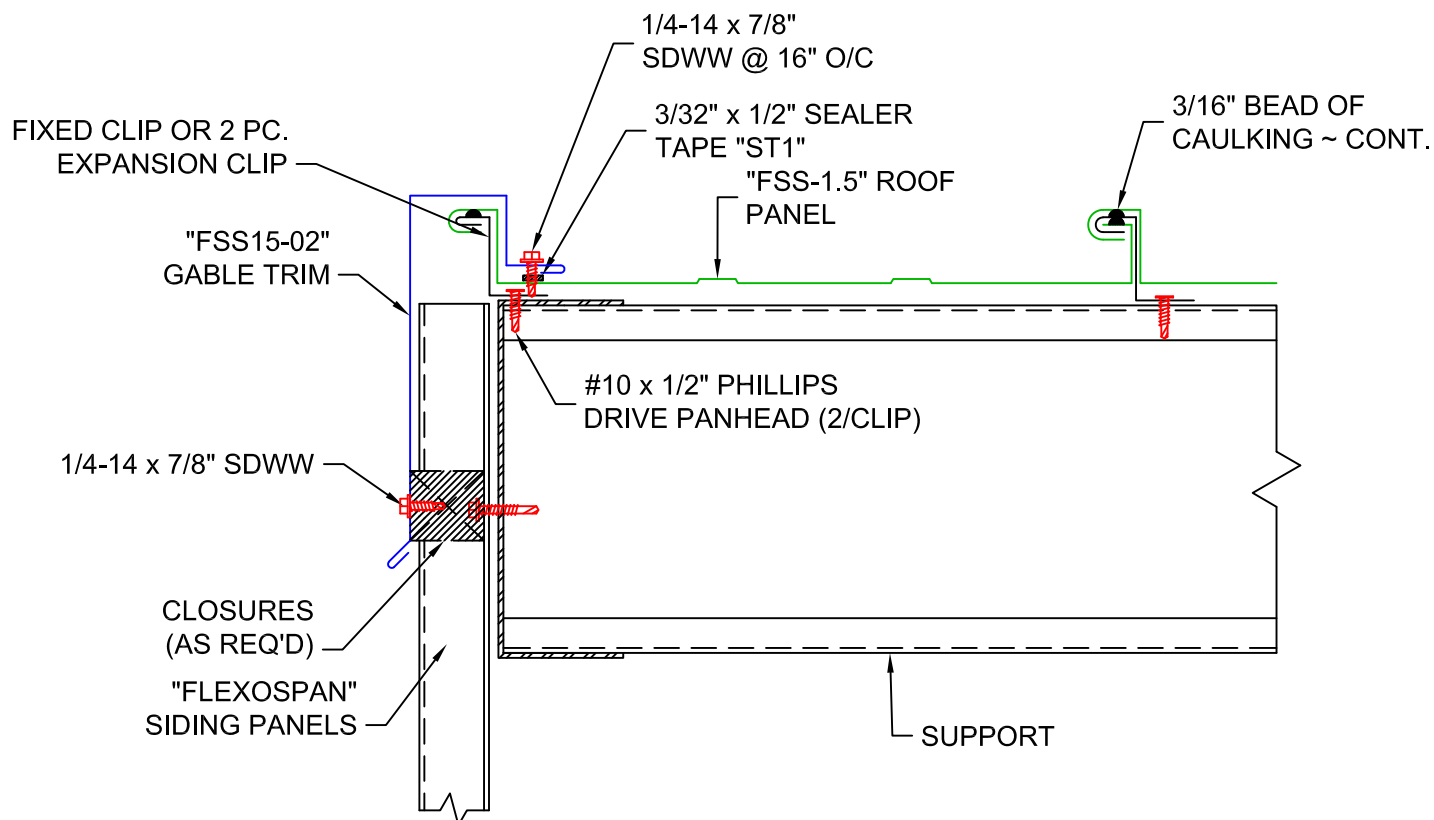

ERECTOR NOTES:

1. START GABLE TRIM @ EAVE & PROCEED UPWARDS CAULKING AND LAPPING EACH 4" MIN.
2. VERTICAL LEG OF "FSS15-02" GABLE TRIM SHOWN FOR 1/2" : 12" PITCH; LEG WILL VARY WITH ROOF PITCH CHANGES.



BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 • FAX: 724-376-3864

**"FSS-1.5" STANDING SEAM
DETAILS**

DRAWN BY:

D. JUREY

DATE:

12-8-25



CHECKED BY:

DATE:

START GABLE DETAIL

DRAWING NO.

FSSI5-10

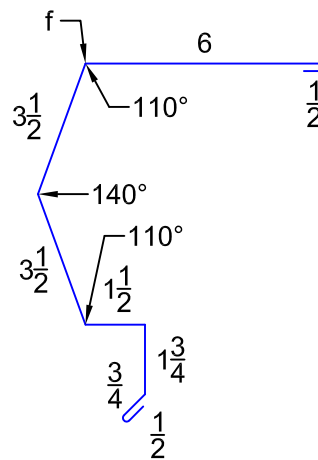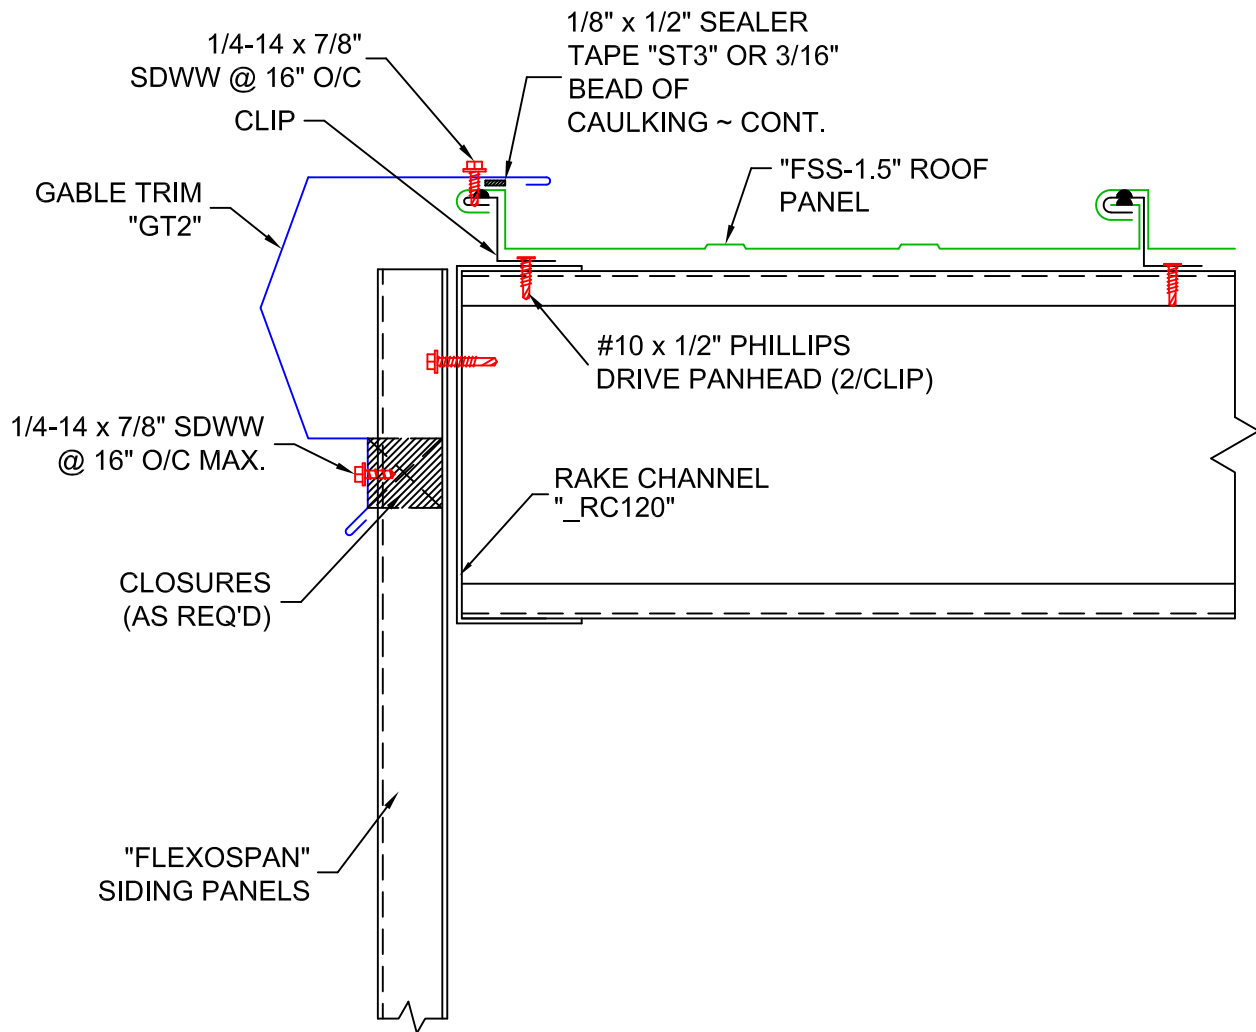

"GT2" GABLE TRIM

ERECTOR NOTES:

1. START GABLE TRIM @ EAVE & PROCEED UPWARDS CAULKING AND LAPPING EACH 4" MIN.



BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 ° FAX: 724-376-3864

**"FSS-1.5" STANDING SEAM
DETAILS**

DRAWN BY:

D. JUREY

DATE:

12-5-25



CHECKED BY:

DATE:


EXPANSION START GABLE
DETAIL

DRAWING NO.

FSSI5-12

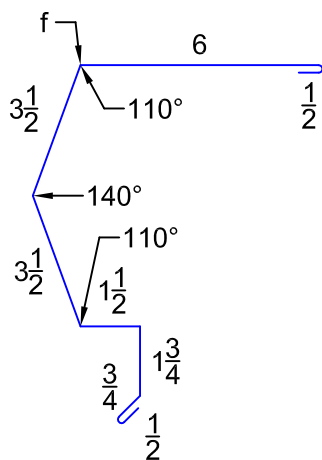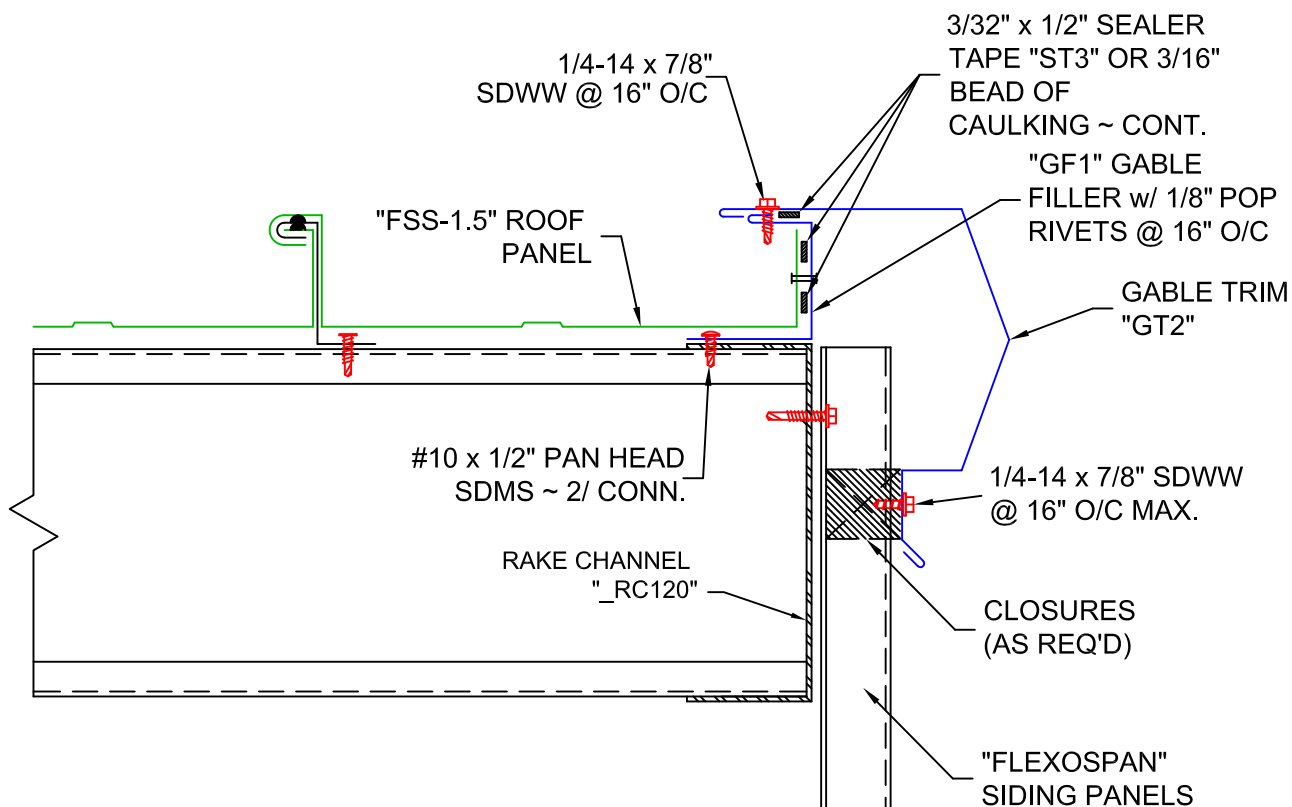

"GT2" GABLE TRIM



"GF1" GABLE FILLER

ERECTOR NOTES:

1. IF "FSS-1.5" ROOF PANEL DOES NOT END ON A HIGH RIB THEN THE PANEL MUST BE FIELD SLIT ALLOWING FOR 1 1/4" TO BE BENT INTO A VERTICAL LEG AND USED IN CONJUNCTION WITH THE "GF1" GABLE FILLER, SEALER TAPE, & POP RIVETS.
2. START GABLE TRIM @ EAVE & PROCEED UPWARDS CAULKING AND LAPPING EACH 4" MIN.



BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 • FAX: 724-376-3864

**"FSS-1.5" STANDING SEAM
DETAILS**

DRAWN BY:

D. JUREY

DATE:

12-5-25



CHECKED BY:

DATE:

EXPANSION START GABLE
DETAIL

DRAWING NO.

FSSI5-13

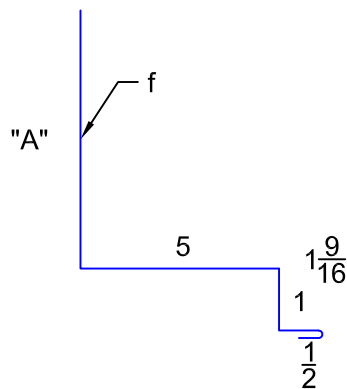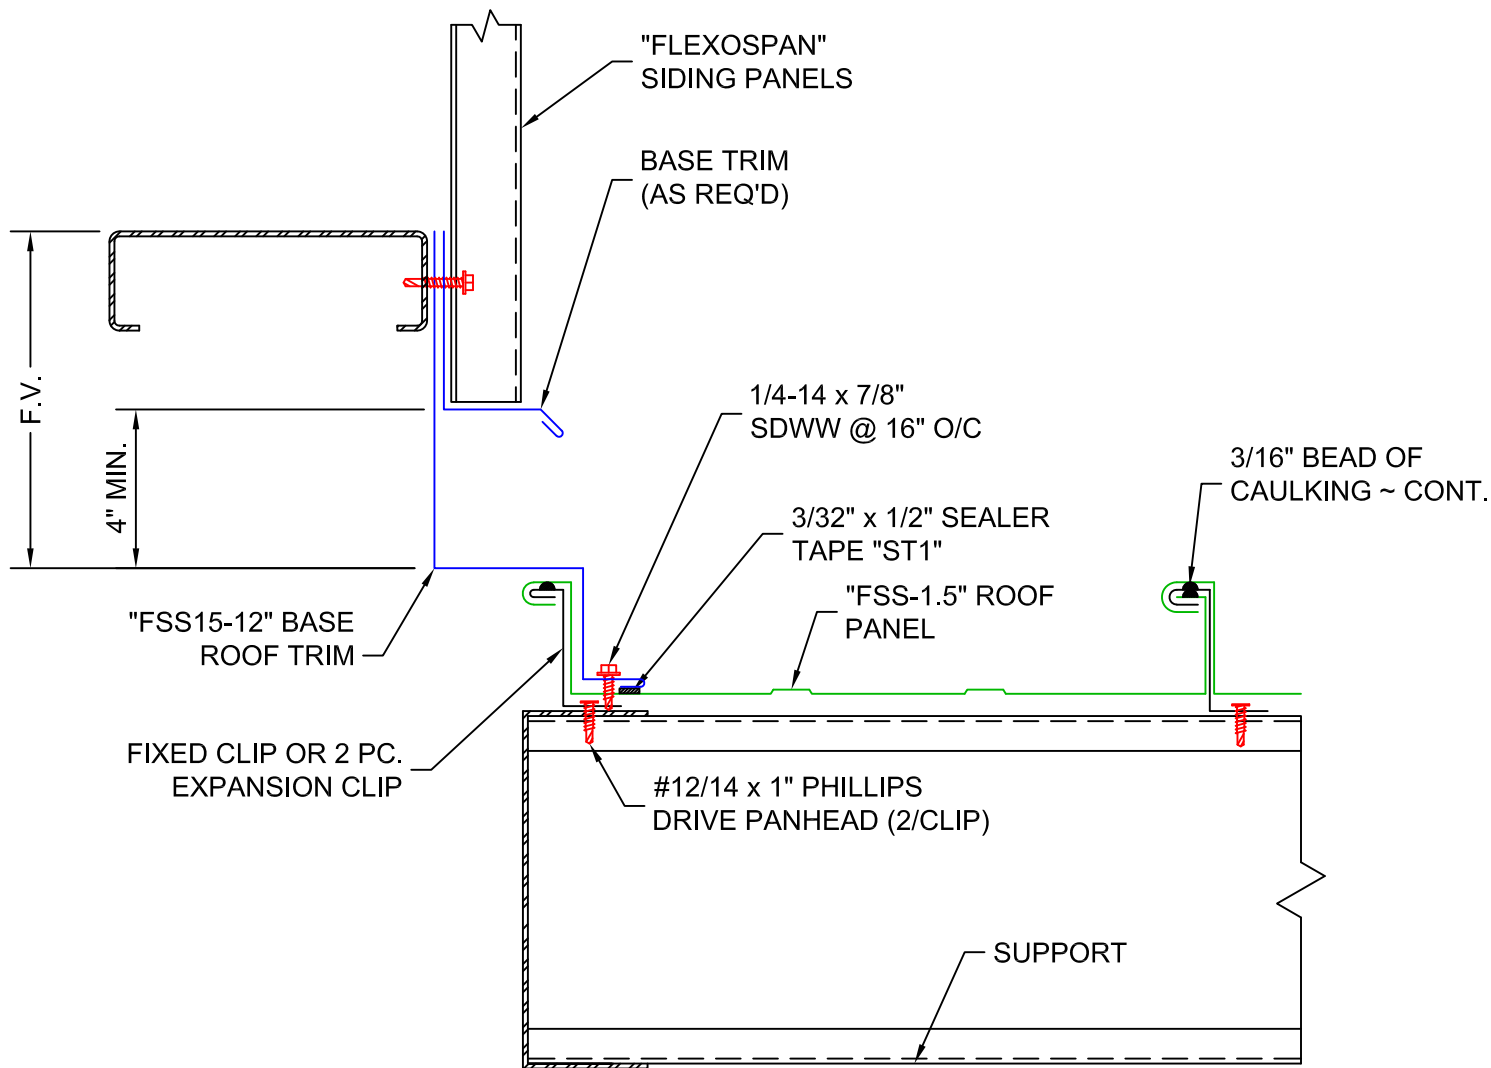

"FSS15-12" BASE ROOF TRIM

ERECTOR NOTES:

1. START BASE ROOF TRIM @ EAVE & PROCEED UPWARDS CAULKING AND LAPPING EACH 4" MIN.
2. "A" DIMENSION VARIES DUE TO CONSTRUCTION VARIATIONS.



BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 • FAX: 724-376-3864

**"FSS-1.5" STANDING SEAM
DETAILS**

DRAWN BY:

D. JUREY

DATE:

12-5-25



CHECKED BY:

DATE:

START BASE ROOF DETAIL

DRAWING NO.

FSSI5-14

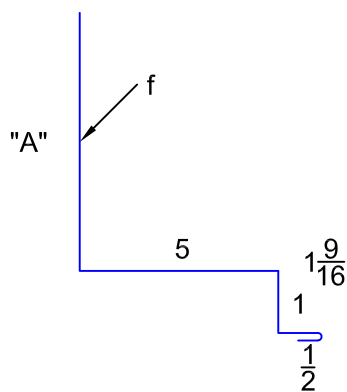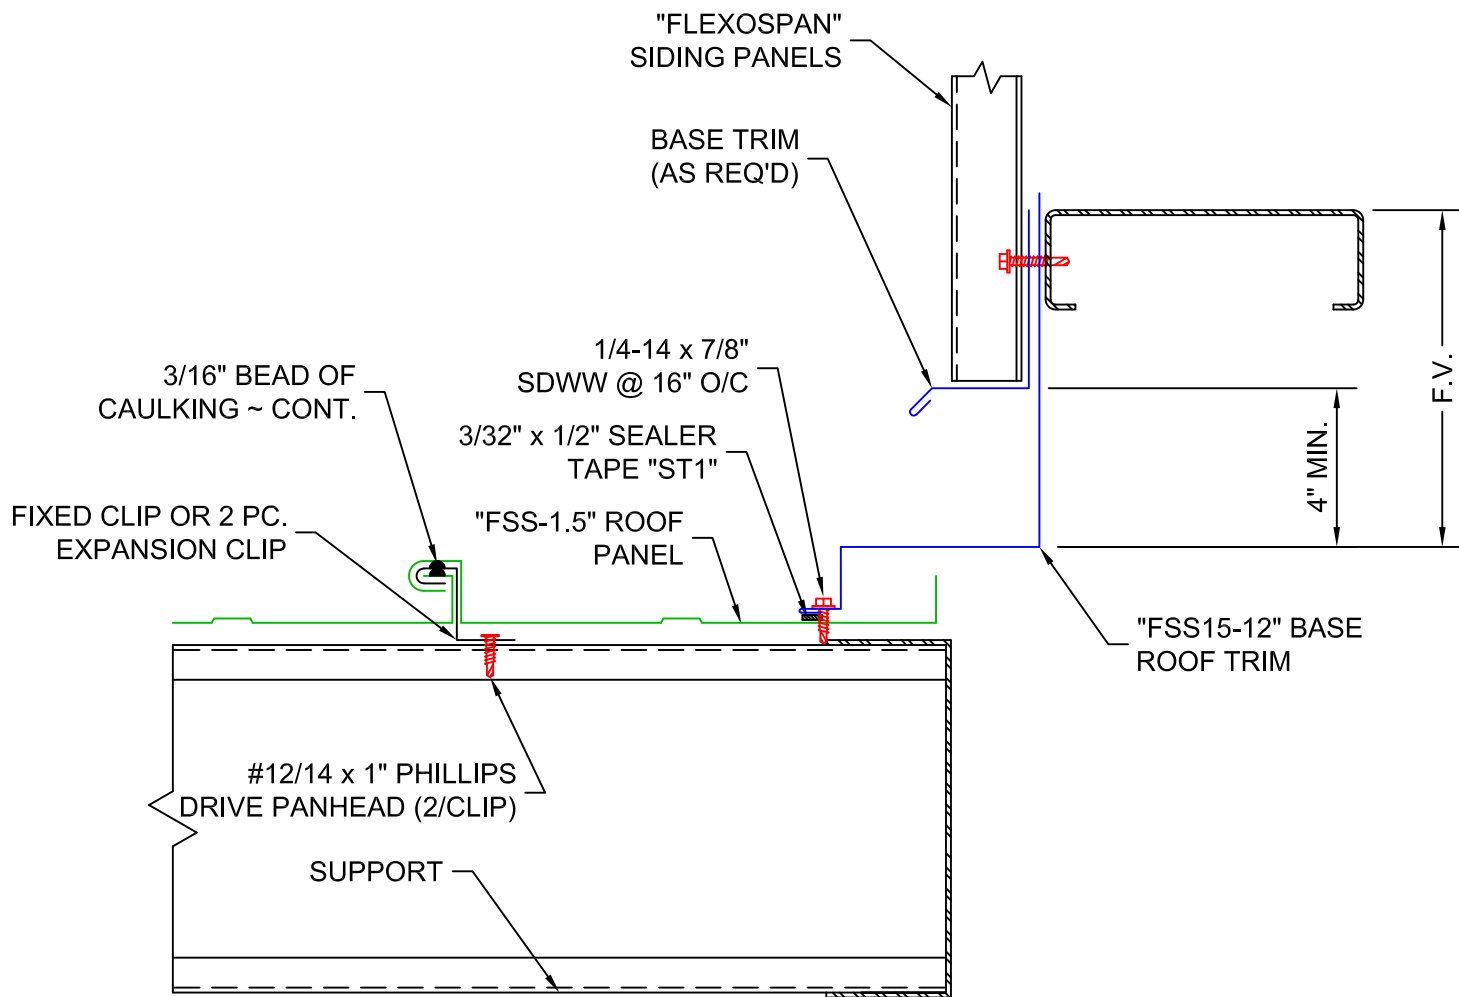

"FSS15-12" BASE ROOF TRIM

ERECTOR NOTES:

1. IF "FSS-1.5" ROOF PANEL DOES NOT END ON A HIGH RIB THEN THE PANEL MUST BE FIELD SLIT ALLOWING FOR 1 1/4" TO BE BENT INTO A VERTICAL LEG AND USED IN CONJUNCTION WITH THE SEALER TAPE, & POP RIVETS.
2. START BASE ROOF TRIM @ EAVE & PROCEED UPWARDS CAULKING AND LAPPING EACH 4" MIN.
3. "A" DIMENSION VARIES DUE TO CONSTRUCTION VARIATIONS.



BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 • FAX: 724-376-3864

**"FSS-1.5" STANDING
SEAM DETAILS**

DRAWN BY:

D. JUREY

DATE:

12-5-25

CHECKED BY:

DATE:

FINISH BASE ROOF
DETAIL

DRAWING NO.

FSSI5-15

"SS15-16" CEE CLOSURE
(FIELD CUT AND FORM)

1/4-14 x 7/8" SDWW
(3/PANEL)

PANNED ENDS OF
ROOF PANELS

"GT3" HI-EAVE
TRIM

1/4-14 x 7/8" SDWW

CLOSURES

"FLEXOSPAN"
SIDING
PANELS

1/4-14 x 7/8" SDWW
@ 8" O/C.

3/32" x 1/2" SEALER
TAPE "ST3" ~ CONT.

CAULKING @ VERT.
LEGS OF PANELS


1/8" x 1 5/8" SEALER
TAPE "ST2"

"FSS-1.5" ROOF
PANELS


ROOF CLIP

#10 x 1/2" PHILLIPS
DRIVE PANHEADS
(2/CLIP)

MARK	PITCH	"A" DIM.
GT31	1:12	85°
GT32	2:12	80°
GT33	3:12	76°
GT34	4:12	72°
GT35	5:12	67°

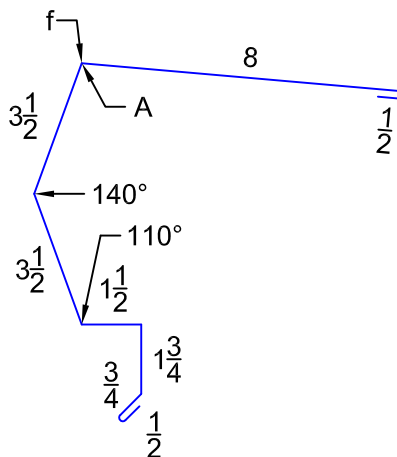

"GT3" HI-EAVE TRIM



"SS15-16" CEE CLOSURE

ERECTOR NOTES:

1. THE ENDS OF ALL ROOF PANELS TO BE PANNED PRIOR TO INSTALLING THE "SS15-16" CEE CLOSURES.
2. THE ENDS OF HIGH EAVE TRIM TO BE CAULKED AND LAPPED 4" AWAY FROM PREVAILING WIND.
3. "SS15-16" CEE CLOSURE TO BE FIELD CUT AND FORMED AS SHOWN ON PAGE "FSS15-6".



BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 ° FAX: 724-376-3864

"FSS-1.5" STANDING SEAM DETAILS

DRAWN BY:

D. JUREY

DATE:

12-5-25


CHECKED BY:

DATE:

HIGH EAVE DETAIL

DRAWING NO.

FSSI5-16

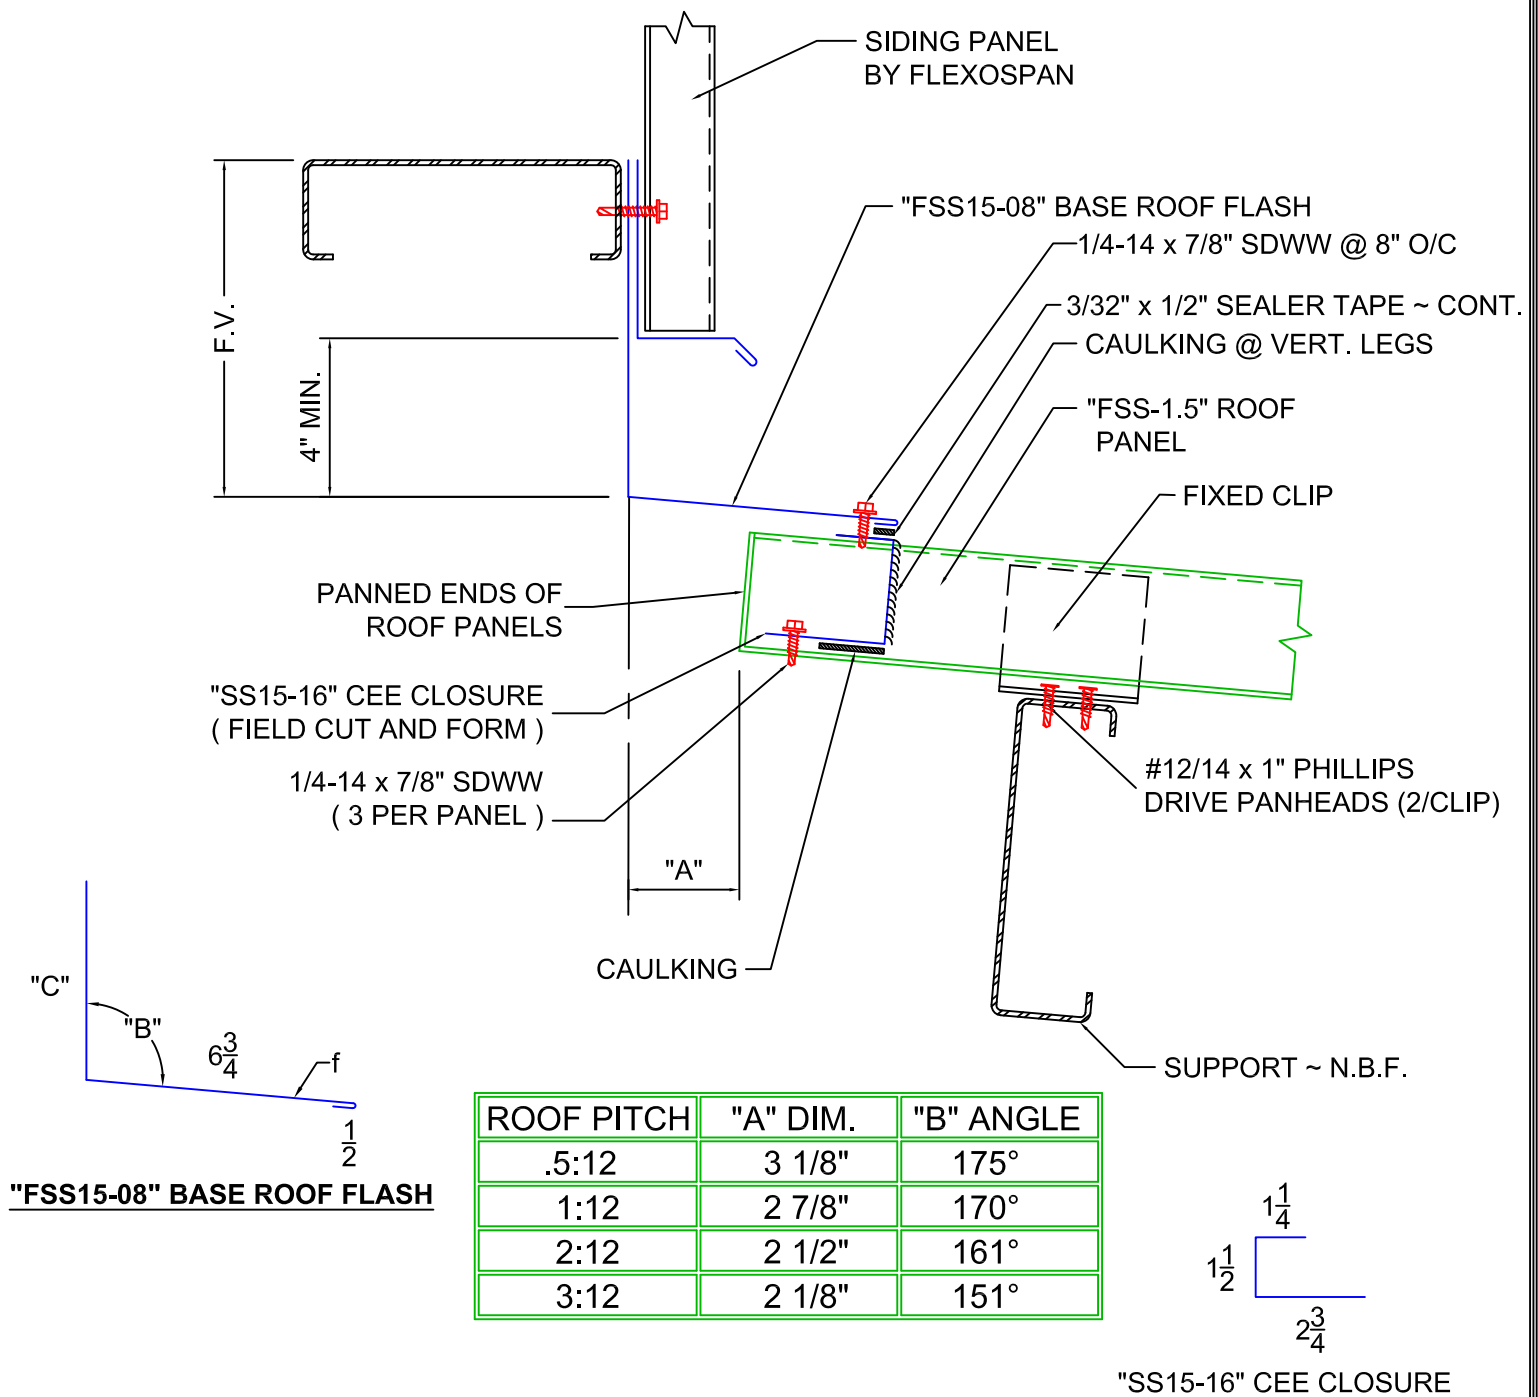

ERECTOR NOTES:

1. THE ENDS OF ROOF SHEETS TO BE POSITIONED "A" DISTANCE AWAY FROM THE CENTERLINE OF THE ROOF. "A" DISTANCE VARIES WITH THE ROOF PITCH. SEE TABLE ABOVE FOR THE "A" VALUE FOR YOUR REQUIRED ROOF PITCH.
2. THE ENDS OF BASE ROOF TO BE CAULKED AND LAPPED 4" AWAY FROM PREVAILING WIND. BASE ROOF TO BE STITCHED WITH TWO FASTENERS.
3. "SS15-16" CEE CLOSURE TO BE FIELD CUT AND FORMED AS SHOWN ON PAGE "FSS15-6".
4. "B" DIMENSION VARIES WITH ROOF PITCH; SEE TABLE ABOVE FOR CORRECT VALUE.



BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 ° FAX: 724-376-3864

"FSS-1.5" STANDING SEAM DETAILS


DRAWN BY: D. JUREY
CHECKED BY:

DATE: 12-5-25
DATE:


BASE ROOF(HALF RIDGE) DETAIL

DRAWING NO.


FSSI5-17

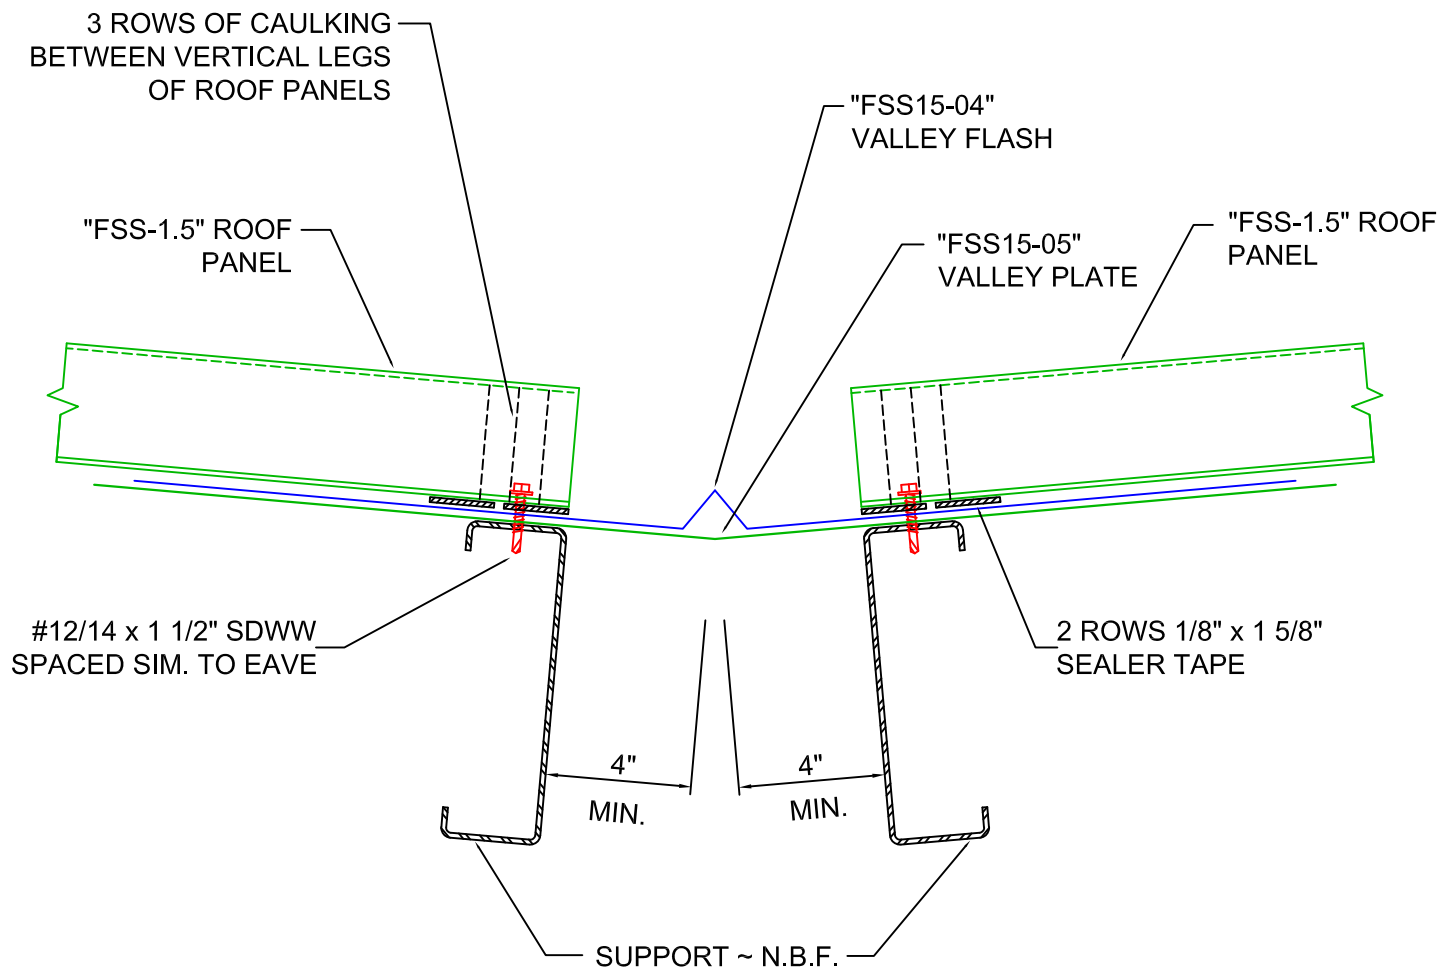

"A" VARIES PER ROOF PITCH

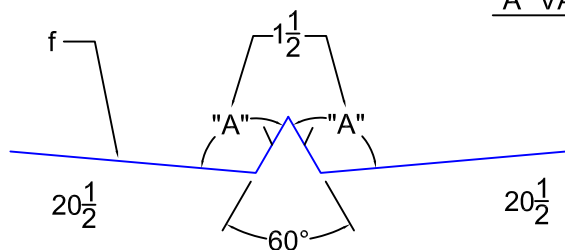

"FSS15-04" VALLEY FLASHING



"FSS15-05" VALLEY PLATE

(18 GA. MIN.)

ERECTOR NOTES:

1. START VALLEY FLASHING & PLATE @ LOW POINT AND PROCEED UPWARDS; LAPPING AND CAULKING EACH 12". CAULKING SHOULD BE USED LIBERALLY TO INSURE A WEATHERTIGHT SEAL. LAPS OF VALLEY FLASHING & PLATE SHOULD BE STAGGERED A MINIMUM OF 2'-0".



BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 ° FAX: 724-376-3864

"FSS-1.5" STANDING SEAM DETAILS

DRAWN BY:

D. JUREY

DATE:

12-5-25

CHECKED BY:

DATE:


VALLEY DETAIL

DRAWING NO.

FSSI5-18

"FSS-1.5" STANDARD TRIM SKETCHES


GA.	# _____ COLOR _____
$14\frac{5}{8}$	

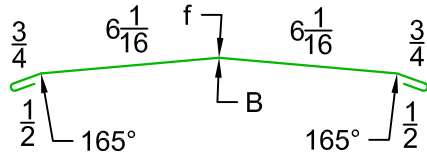

REQ'D: _____ PCS. @ 10'-0" LG.

"RC1" RIDGE CAP


GA.	# _____ COLOR _____
$5\frac{1}{2}$	



REQ'D: _____ PCS. @ 10'-0" LG.

"SS15-16" CEE CLOSURE


GA.	# _____ COLOR _____

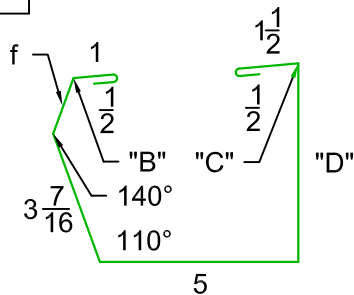

REQ'D: _____ PCS. @ 10'-0" LG.

"SSGU2" GUTTER

GA.	# _____ COLOR _____
$2\frac{1}{8}$	



REQ'D: _____ PCS. @ 1'-0" LG.

"GSS1" GUTTER BARS

NOTES:

1. ALL TRIM IS MANUFACTURED IN 10'-0" LENGTHS UNLESS SPECIFIED OTHERWISE.
2. MAXIMUM LENGTH OF TRIM IS 10'-0".
3. PLEASE INSERT GAUGE OF MATERIAL IN SPACES PROVIDED.
4. PLEASE INSERT COLOR OF MATERIAL IN SPACES PROVIDED.
5. PLEASE INSERT QUANTITY DESIRED WHERE SHOWN.
6. PLEASE INSERT REQ'D DIMENSIONS.



BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 • FAX: 724-376-3864

"FSS-1.5" STANDING SEAM DETAILS

DRAWN BY:

D. JUREY

DATE:

12-5-25

REVISED BY:

DATE:


"FSS-1.5" STANDARD TRIM SKETCHES

DRAWING NO.

FSSI5-19

"FSS-1.5" STANDARD TRIM SKETCHES

GA.	# _____ COLOR _____

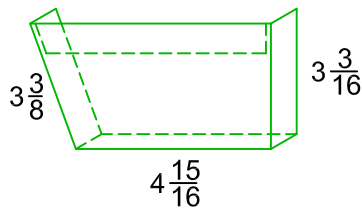


"GU1ECR" ~ AS SHOWN
"GU1ECL" ~ OPP. HAND

REQ'D: _____ PCS.

GA.	# _____ COLOR _____

15 1/2"




REQ'D: _____ PCS. @ 10'-0" LG.

"GU1EC(R&L) END CAPS

"DS1" DOWNSPOUTS


GA.	# _____ COLOR _____

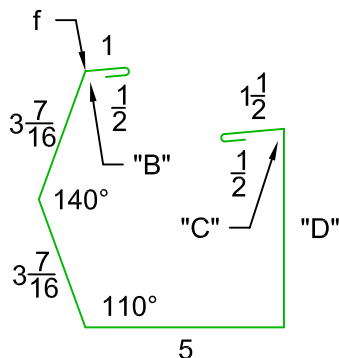

REQ'D: _____ PCS. @ 10'-0" LG.

GA.	# _____ COLOR _____

2 1/4"



REQ'D: _____ PCS. @ 1'-0" LG.

"GU1" GUTTER

"SS15-14" GUTTER BARS

NOTES:

1. ALL TRIM IS MANUFACTURED IN 10'-0" LENGTHS UNLESS SPECIFIED OTHERWISE.
2. MAXIMUM LENGTH OF TRIM IS 10'-0".
3. PLEASE INSERT GAUGE OF MATERIAL IN SPACES PROVIDED.
4. PLEASE INSERT COLOR OF MATERIAL IN SPACES PROVIDED.
5. PLEASE INSERT QUANTITY DESIRED WHERE SHOWN.
6. PLEASE INSERT REQ'D DIMENSIONS.



BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 • FAX: 724-376-3864

"FSS-1.5" STANDING SEAM DETAILS

DRAWN BY:

D. JUREY

DATE:

12-5-25

REVISED BY:

DATE:

"FSS-1.5" STANDARD TRIM SKETCHES


DRAWING NO.

FSS15-20

"FSS-1.5" STANDARD TRIM SKETCHES

GA. # _____ COLOR _____

11 1/2

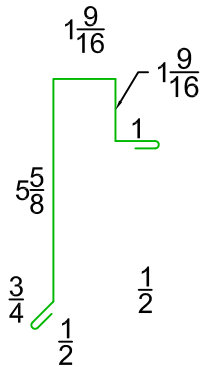


REQ'D: _____ PCS. @ 10'-0" LG.

"FSS15-02" GABLE TRIM

GA. # _____ COLOR _____

18

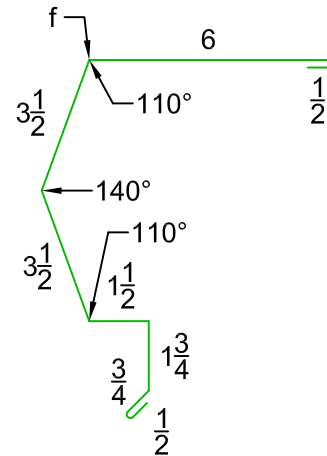


REQ'D: _____ PCS. @ 10'-0" LG.

"GT2" GABLE TRIM

GA. # _____ COLOR _____


5 1/2



REQ'D: _____ PCS. @ 10'-0" LG.

"GF1" GABLE FILLER

GA. # _____ COLOR _____

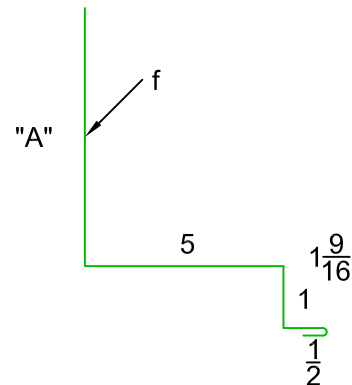

REQ'D: _____ PCS. @ 10'-0" LG.

"FSS15-12" BASE ROOF TRIM

NOTES:

1. ALL TRIM IS MANUFACTURED IN 10'-0" LENGTHS UNLESS SPECIFIED OTHERWISE.
2. MAXIMUM LENGTH OF TRIM IS 10'-0".
3. PLEASE INSERT GAUGE OF MATERIAL IN SPACES PROVIDED.
4. PLEASE INSERT COLOR OF MATERIAL IN SPACES PROVIDED.
5. PLEASE INSERT QUANTITY DESIRED WHERE SHOWN.
6. PLEASE INSERT REQ'D DIMENSIONS.



BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 • FAX: 724-376-3864

"FSS-1.5" STANDING SEAM DETAILS

DRAWN BY:

D. JUREY

DATE:

12-5-25

REVISED BY:

DATE:



"FSS-1.5" STANDARD TRIM SKETCHES

DRAWING NO.

FSSI5-21

"FSS-1.5" STANDARD TRIM SKETCHES


GA. # _____ COLOR _____



REQ'D: _____ PCS. @ 10'-0" LG.

GA. # _____ COLOR _____

41 7/8

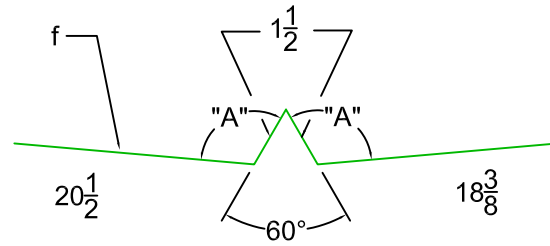


REQ'D: _____ PCS. @ 10'-0" LG.

"FSS15-08" BASE ROOF FLASH

"FSS15-04" VALLEY FLASHING

GA. # _____ COLOR _____

44"




(18 GA. MIN.)

REQ'D: _____ PCS. @ 10'-0" LG.

GA. # _____ COLOR _____

20"

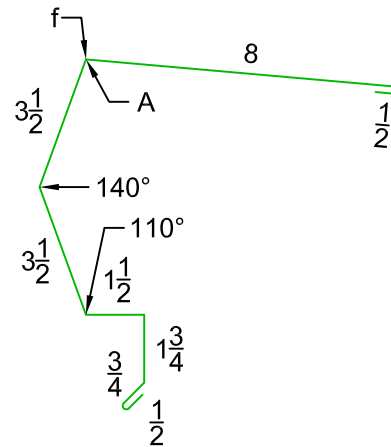

REQ'D: _____ PCS. @ 10'-0" LG.

"FSS15-05" VALLEY PLATE

"GT3" HI EAVE TRIM

NOTES:

1. ALL TRIM IS MANUFACTURED IN 10'-0" LENGTHS UNLESS SPECIFIED OTHERWISE.
2. MAXIMUM LENGTH OF TRIM IS 10'-0".
3. PLEASE INSERT GAUGE OF MATERIAL IN SPACES PROVIDED.
4. PLEASE INSERT COLOR OF MATERIAL IN SPACES PROVIDED.
5. PLEASE INSERT QUANTITY DESIRED WHERE SHOWN.
6. PLEASE INSERT REQ'D DIMENSIONS.



BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 ° FAX: 724-376-3864

"FSS-1.5" STANDING SEAM DETAILS

DRAWN BY: D. UREY

DATE: 12-5-25

REVISED BY:


DATE:

"FSS-1.5" STANDARD TRIM SKETCHES

DRAWING NO.


FSS15-22

"FSS-1.5" STANDARD ACCESSORIES



REQ'D: _____ ROLLS @ 35'-0" LG.

3/32" x 1/2" SEALER TAPE "ST1"

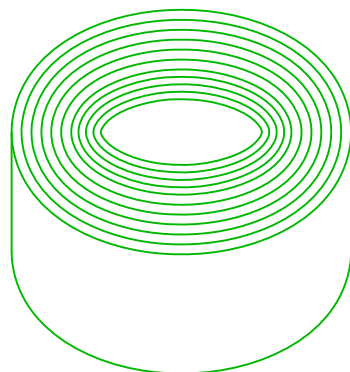

REQ'D: _____ ROLLS @ 30'-0"

1/8" x 1 5/8" SEALER TAPE "ST2"

SHEETING
SCREWS



#12/14 x 1 1/2" SDWW

REQ'D: _____ PCS.

LAP & TRIM
SCREWS



1/4-14 x 7/8" SDWW

REQ'D: _____ PCS.

STANDARD FASTENERS

NOTES:

1. EAVE PLUG CLOSURES ARE A CLOSED CELL POLYETHYLENE FACTORY FORMED TO THE TRAPEZOIDAL AREA OF THE PANEL PROFILE AS SHOWN ABOVE.
2. SEALER TAPE IS A NON-DRYING, NON-SKINNING, BUTYL BASE TAPE SUPPLIED IN 3/32" THICK x 1/2" WIDE x 50' ROLLS.
3. FASTENERS ARE ZINC PLATED CARBON STEEL, 5/16" HEX HEAD, SELF DRILLING & SELF TAPPING METAL SCREWS. FASTENERS CAN BE SUPPLIED WITH PAINTED HEADS TO MATCH ROOFING OR SIDING.
4. CONTACT FACTORY FOR PRICE AND AVAILABILITY OF NON-STANDARD ACCESSORIES.



BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 • FAX: 724-376-3864

"FSS-I5" STANDING SEAM DETAILS

DRAWN BY:

D. JUREY

DATE:

12-5-25

CHECKED BY:


DATE:

"FSS-I5" STANDARD
ACCESSORIES

DRAWING NO.

FSSI5-23

"FSS-15" STANDARD ACCESSORIES

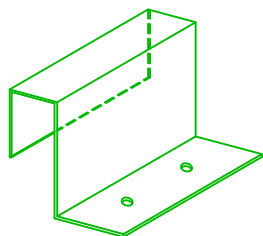


"FC1.5" FIXED CLIP

REQ'D: _____ PCS.

"FC1.5" 1 PC. FIXED CLIPS

CLIP
SCREWS



#10 x 1/2" PHILLIPS
DRIVE PANHEAD (2/CLIP)

REQ'D: _____ PCS.

STANDARD CLIP FASTENERS

NOTES:

1. EAVE PLUG CLOSURES ARE A CLOSED CELL POLYETHYLENE FACTORY FORMED TO THE TRAPEZOIDAL AREA OF THE PANEL PROFILE AS SHOWN ABOVE.
2. SEALER TAPE IS A NON-DRYING, NON-SKINNING, BUTYL BASE TAPE SUPPLIED IN 3/32" THICK x 1/2" WIDE x 50' ROLLS.
3. FASTENERS ARE ZINC PLATED CARBON STEEL, 5/16" HEX HEAD, SELF DRILLING & SELF TAPPING METAL SCREWS. FASTENERS CAN BE SUPPLIED WITH PAINTED HEADS TO MATCH ROOFING OR SIDING.
4. CONTACT FACTORY FOR PRICE AND AVAILABILITY OF NON-STANDARD ACCESSORIES.



BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 • FAX: 724-376-3864

"FSS-15" STANDING SEAM DETAILS

DRAWN BY: D. JUREY

DATE: 12-5-25

REVISED BY:


DATE:

"FSS-1.5" STANDARD
ACCESSORIES

DRAWING NO.


FSS15-24

"FSS-1.5" STANDARD ACCESSORIES

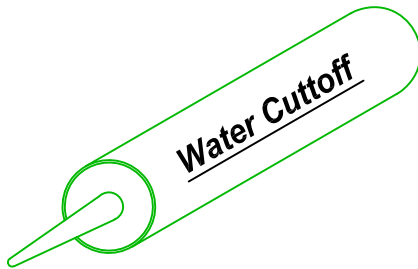

REQ'D: _____ TUBES(11 OZ.)

WATER CUTOFF CAULKING

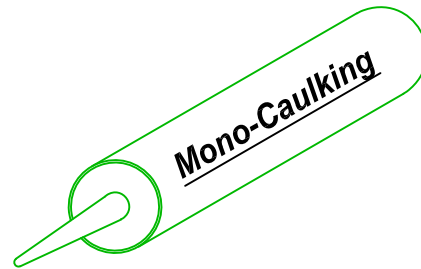

REQ'D: _____ TUBES(11OZ.)

MONO-CAULKING

NOTES:

1. CONTACT FACTORY FOR PRICE AND AVAILABILITY OF NON-STANDARD ACCESSORIES.



BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 ° FAX: 724-376-3864

"FSS-1.5" STANDING SEAM DETAILS

DRAWN BY: D. JUREY

CHECKED BY:

DATE: 12-5-25

DATE:

"FSS-1.5" STANDARD
ACCESSORIES

DRAWING NO.

FSSI5-25