



**"FS-80-3" BASE
ROOF FLASH**


PITCH	"A" ANGLE
1:12	95°
2:12	99°
3:12	104°
4:12	108°
5:12	113°




**"FS-80-4" BASE
ROOF FLASH**



**"FS-80-5" BASE
TRIM**

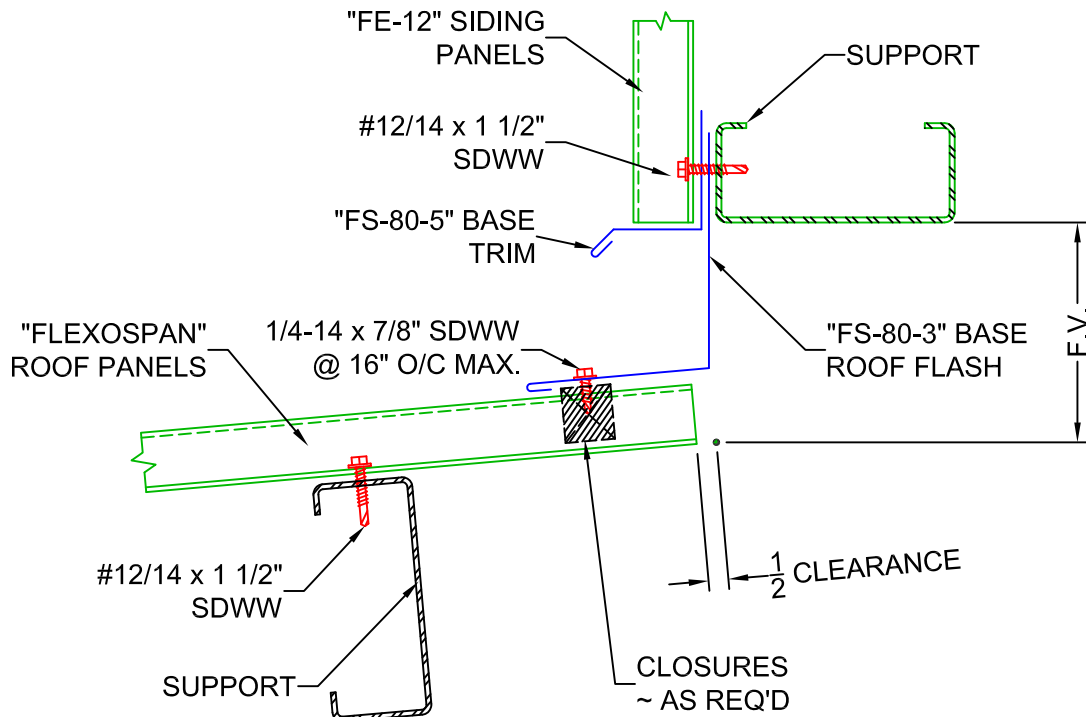

BASE ROOF(HALF RIDGE) DETAIL

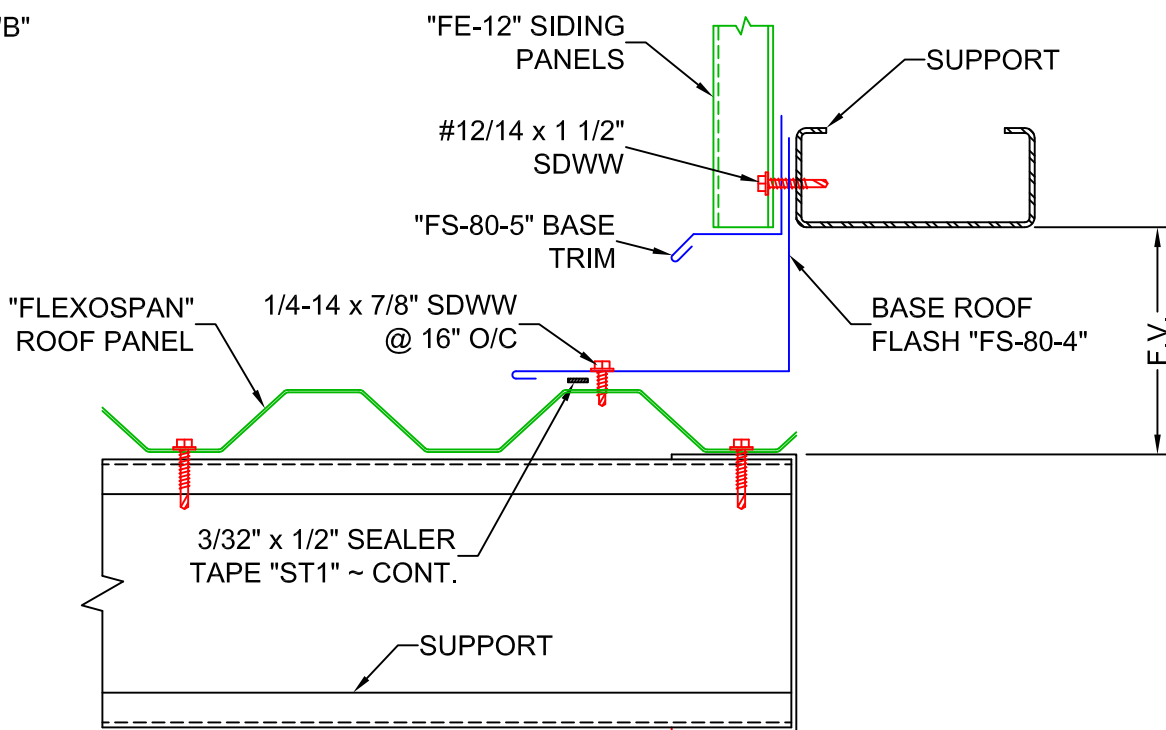

BASE ROOF DETAIL

ERECTOR NOTES:

1. ENDS OF BASE ROOF FLASH SHOULD BE CAULKED AND LAPPED 4" AWAY FROM PREVAILING WIND. FLASHING SHOULD BE STITCHED TOGETHER AT ENDS USING TWO 1/4-14 x 7/8" SDWW FASTENERS.
2. "A" & "B" DIMENSIONS VARY DUE TO CONSTRUCTION VARIATIONS.



BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 • FAX: 724-376-3864

"FE-12" CONCEALED FASTENER PANEL STANDARD DETAILS

DRAWN BY: D. JUREY

DATE: 8/7/25

CHECKED BY:

DATE:

BASE ROOF DETAILS

DRAWING NO.

FE12-6