




"LE3" EAVE TRIM



"FRGU2" GUTTER




"GSS1" GUTTER BARS

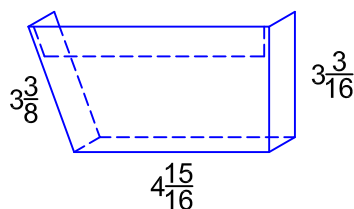


"GU1EC(R&L)" END CAPS


"GU1ECR" ~ AS SHOWN
"GU1ECL" ~ OPP. HAND



"DS1" DOWNSPOUTS

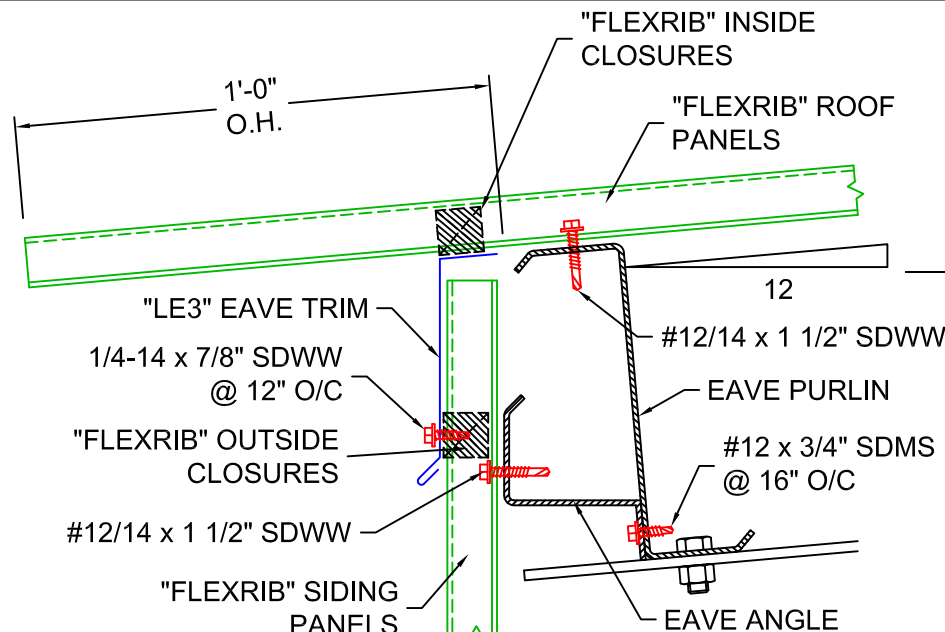

EAVE w/ TRIM

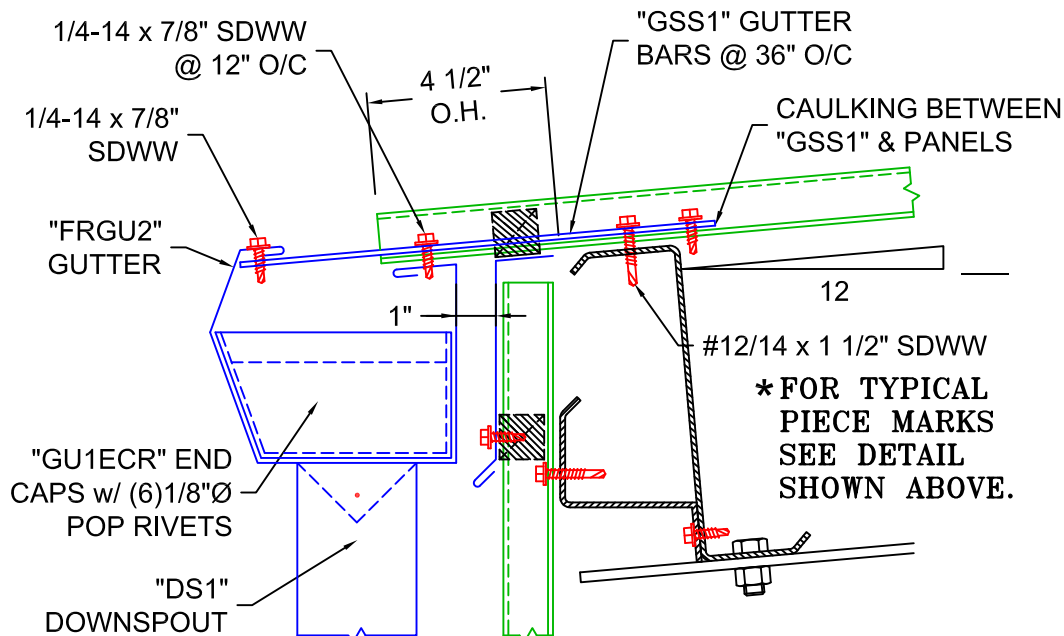

EAVE w/ TRIM & FLUSH GUTTER

NOTES:

1. GUTTER TO BE CAULKED & LAPPED 4" MIN. AND POP RIVETED TOGETHER USING (8) 1/8"Ø POP RIVETS.
2. FIELD LOCATE AND MARK DOWNSPOUT LOCATION IN BOTTOM OF GUTTER. DRAW LINE FROM CORNER TO CORNER AND CUT ALONG LINE. BEND TABS DOWN AND POP RIVET INSIDE DOWNSPOUT.
3. USE THE CHART TO THE LEFT FOR DIMENSION VALUES FOR YOUR PARTICULAR ROOF PITCH.
4. GUTTER SIZE AND GUTTER BAR SPACING MUST BE ADJUSTED TO SUIT LOCAL WEATHER PECULIARITIES AND/OR TO ACCOMMODATE LONG ROOF SLOPES.

ROOF PITCH	GIRTH	"A"	"B"	"C"	"D"	"E"
1:12	19 3/4"	2 3/16"	115°	85°	5 5/8"	95°
2:12	20 1/16"	2 1/8"	119°	81°	6"	100°
3:12	20 5/16"	2"	124°	76°	6 3/8"	104°
4:12	20 9/16"	1 13/16"	128°	72°	6 13/16"	109°
5:12	20 7/8"	1 3/4"	133°	67°	7 3/16"	113°



BOX 515 RAILROAD STREET
SANDY LAKE, PENNSYLVANIA 16145-0515
PHONE: 800-245-0396 • FAX: 724-376-3864

"FLEXRIB" STANDARD DETAILS

DRAWN BY: D. JUREY
REVISED BY:

DATE: 7/30/25
DATE:

BUILDING
EAVE DETAILS

DRAWING NO.

FLEXRIB-5B