
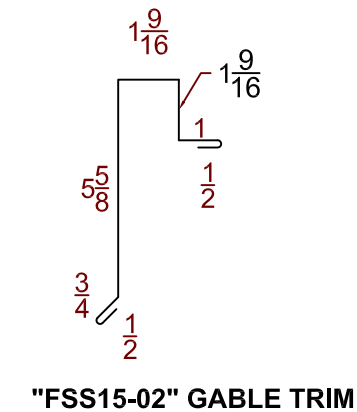


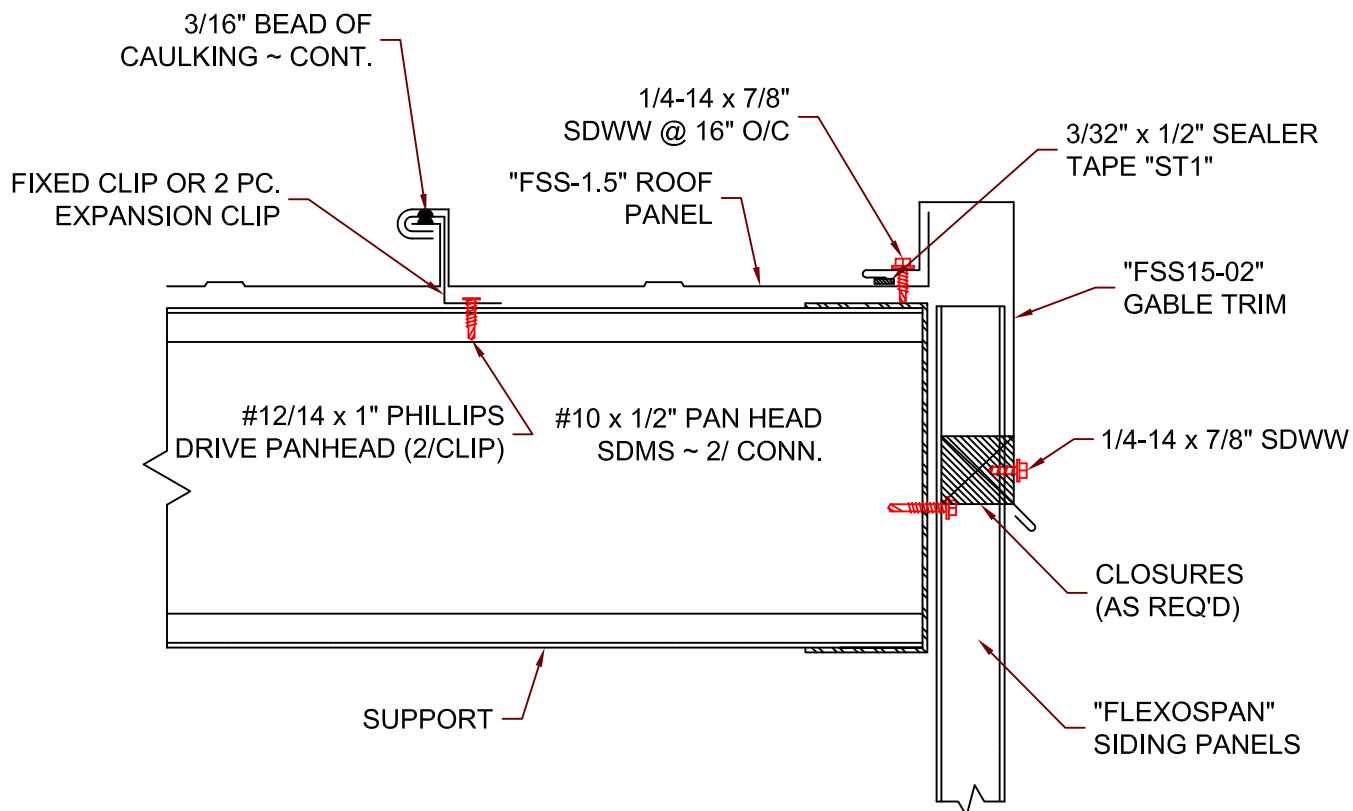

ERECTOR NOTES:

1. IF "FSS-1.5" ROOF PANEL DOES NOT END ON A HIGH RIB THEN THE PANEL MUST BE FIELD SLIT ALLOWING FOR 1 1/4" TO BE BENT INTO A VERTICAL LEG AND USED IN CONJUNCTION WITH THE SEALER TAPE, & POP RIVETS.
2. START GABLE TRIM @ EAVE & PROCEED UPWARDS CAULKING AND LAPPING EACH 4" MIN.
3. VERTICAL LEG OF "FSS15-02" GABLE TRIM SHOWN FOR 1/2" :12" PITCH;
LEG WILL VARY WITH ROOF PITCH CHANGES.

FLEXOSPAN
 BOX 515 RAILROAD STREET
 SANDY LAKE, PENNSYLVANIA 16145-0515
 PHONE: 800-245-0396 ° FAX: 724-376-3864

**"FSS-1.5" STANDING
SEAM DETAILS**

DRAWN BY: *D. JUREY*
 CHECKED BY:

DATE: *9-27-05*
 DATE:

FINISH GABLE DETAIL

DRAWING NO.

FSSI5-II